


# framery

SERIOUS ABOUT HAPPINESS

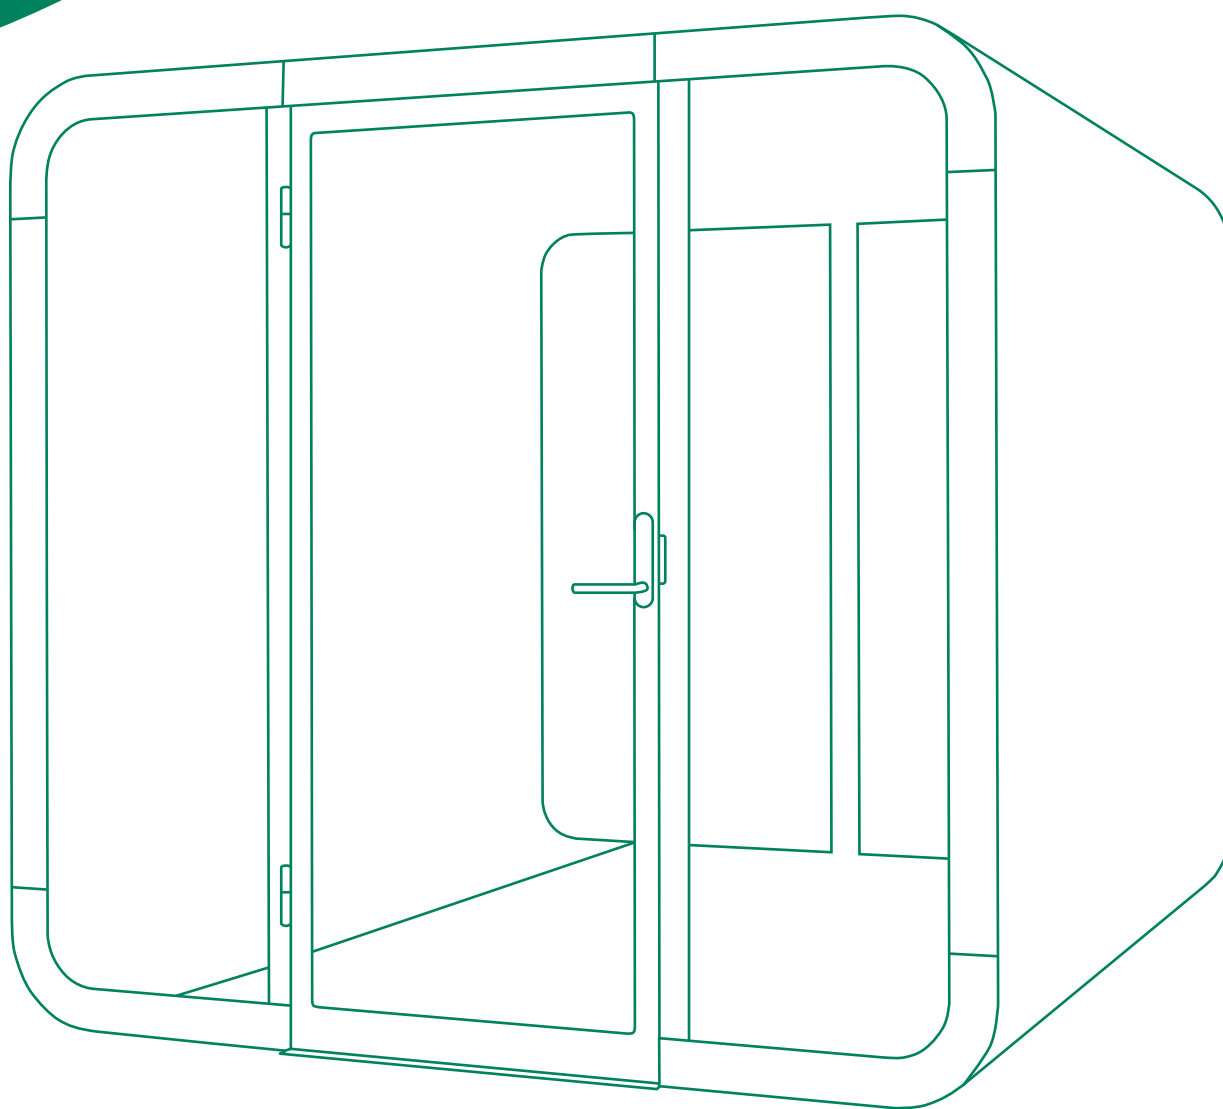

Framery 2Q

Logitech Installation Instructions

English  
Version 1.0

Tampere, Finland 25.04.2023



# Contents


<b>1 Cable management.....</b>	<b>5</b>
<b>2 Huddle.....</b>	<b>6</b>
2.1 Install the TV Mount for Video Bars.....	6
2.2 Install Rally Bar Mini.....	8
2.3 Install the display.....	12
<b>3 Lounge.....</b>	<b>13</b>
3.1 Install the TV Mount for Video Bars.....	13
3.2 Install Rally Bar Mini.....	16
3.3 Install the display.....	19
<b>4 Tap.....</b>	<b>20</b>
4.1 Install Tap meeting room touch controller.....	20
<b>5 Tap Scheduler.....</b>	<b>25</b>
5.1 Routing of the Tap Scheduler LAN cord.....	25
5.2 Install Tap Scheduler to the booking system bracket.....	25



# 1 Cable management


Route, arrange, and support all cables and cords in a clear and organized way. This makes it easy to identify different cords in case they must be disconnected or removed.

- Use cable ties to bundle cords together.
- Use black fixing bands to attach the cord bundles to the bottom of the table.

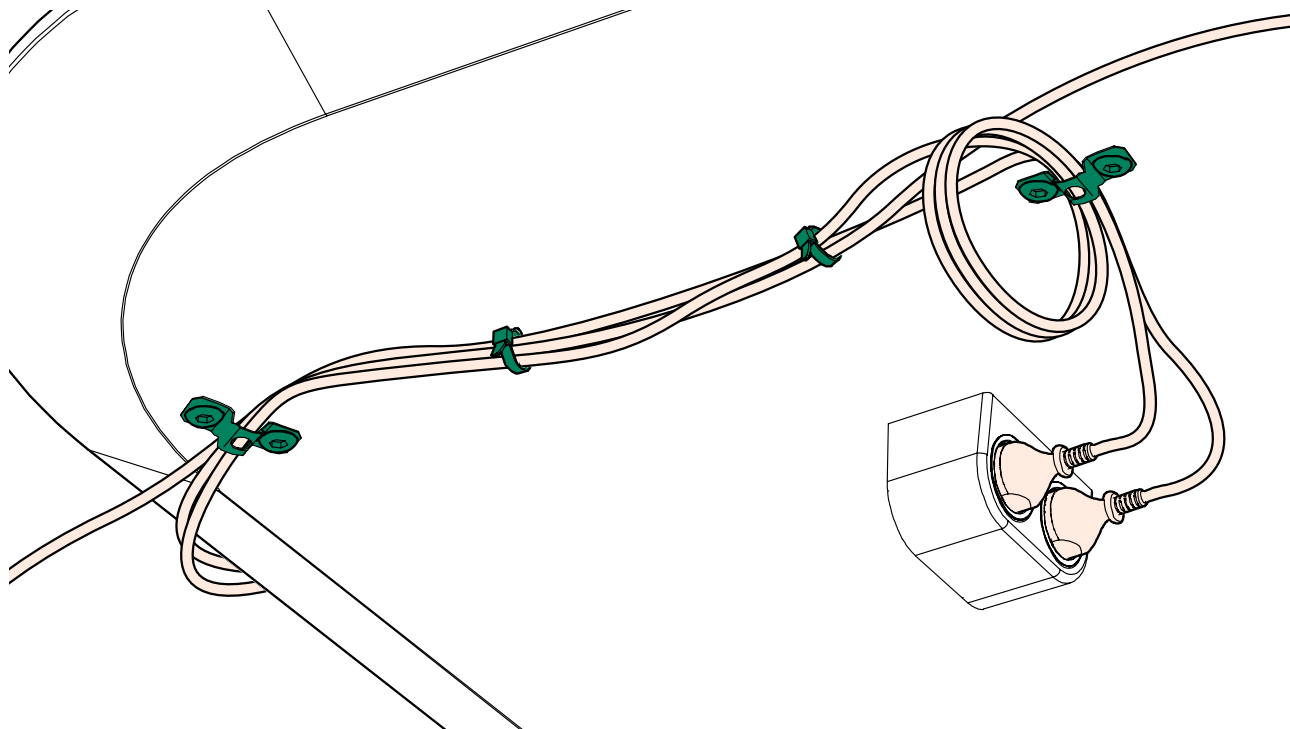

## 2 Huddle

This section contains instructions that are specific to Framery 2Q Huddle.

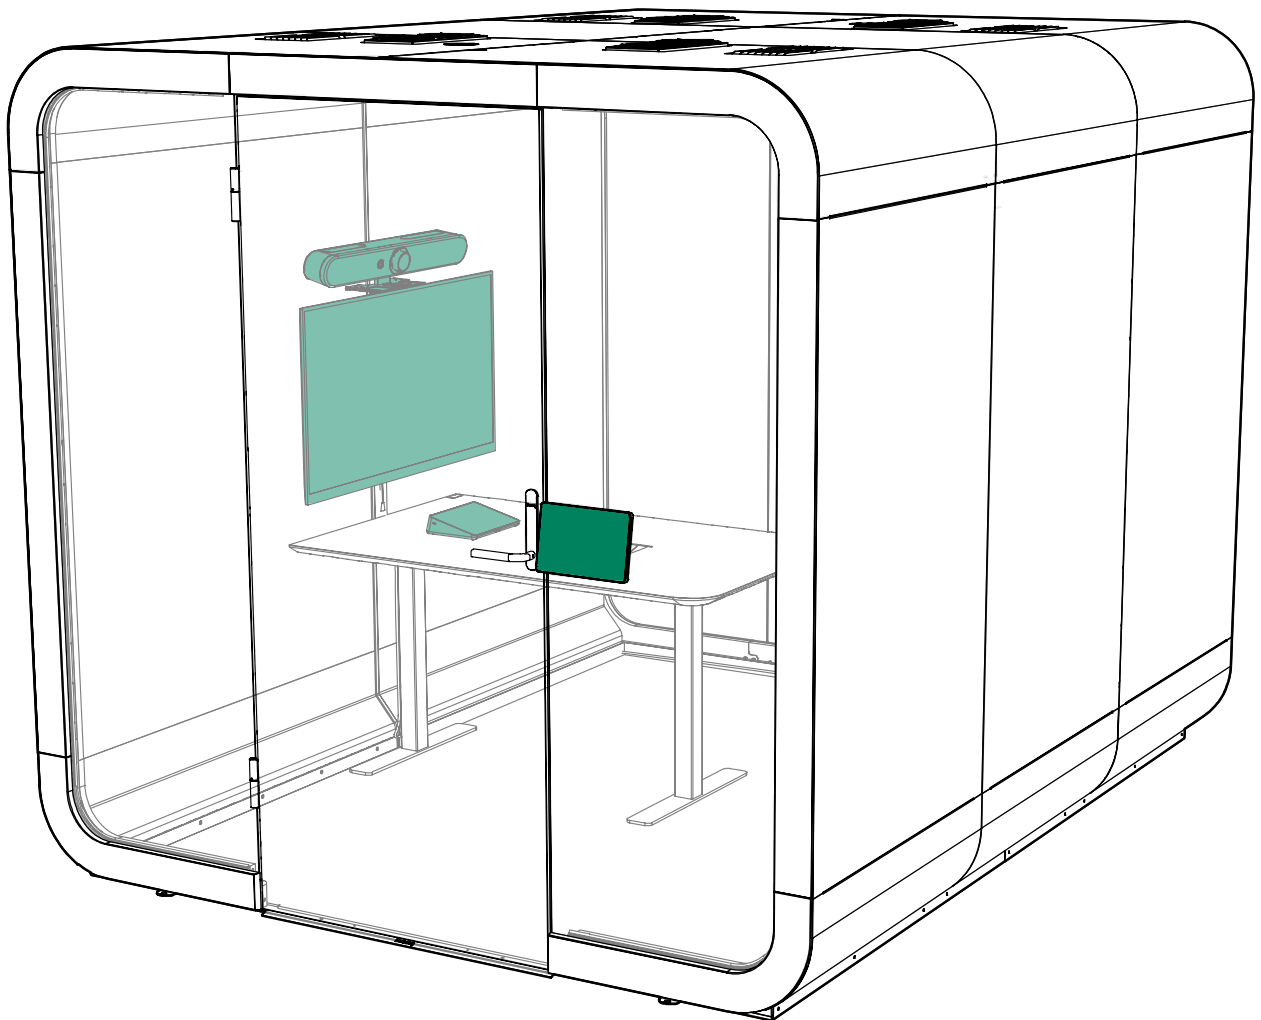

### 2.1 Install the TV Mount for Video Bars


1. Place TV Mount for Video Bars on the back of the display with the display mounting bracket resting on top of the TV mount.




**Note:** Rally Bar Mini is installed above the display. Make sure that the TV mount is oriented correctly.

2. Install the display mounting bracket and TV mount to the display with the supplied nuts (4 pcs).

- ⚠ **Note:** Make sure that the display bracket is in the center of the display.
- ⚠ **Note:** Make sure that the square hole on the display bracket is at the lower end of the bracket.

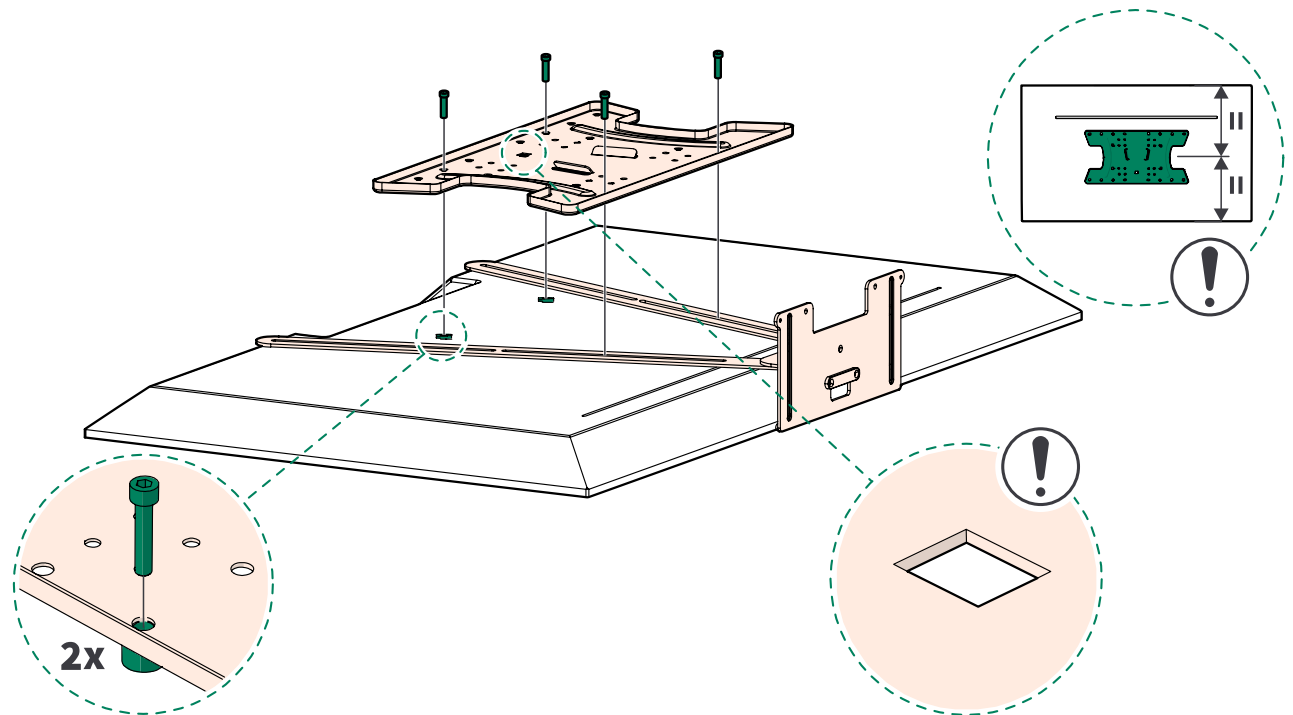


3. Align the TV mount with the front of the display.

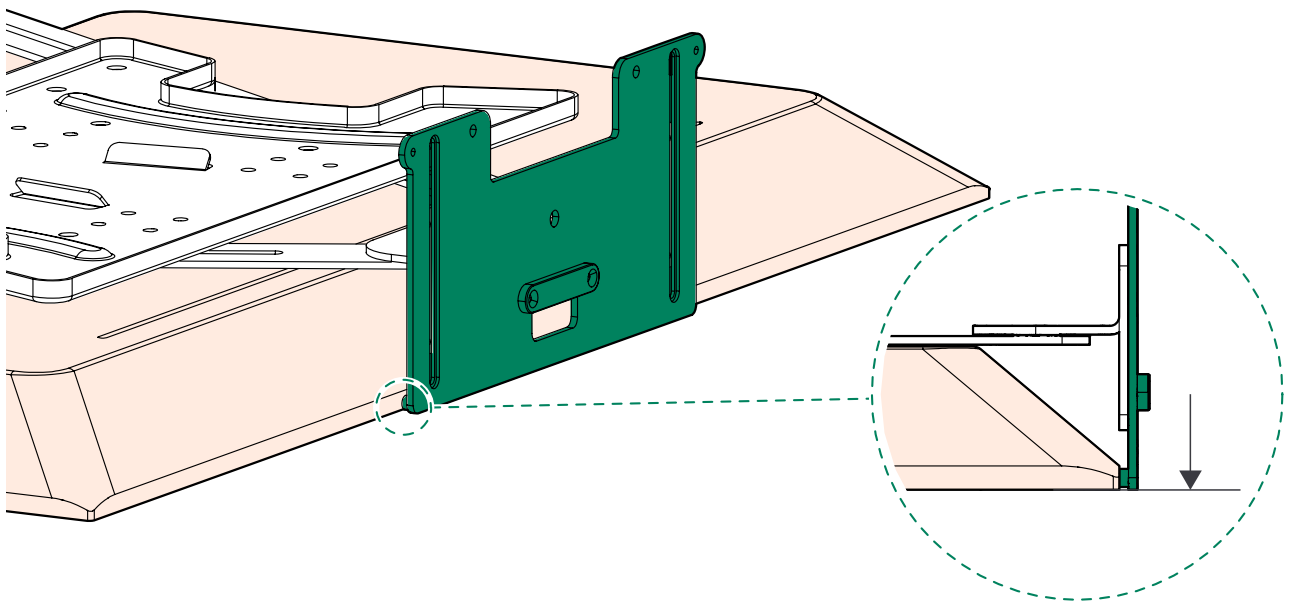


## 2.2 Install Rally Bar Mini

1. Assemble the mounting bracket for Rally Bar Mini.

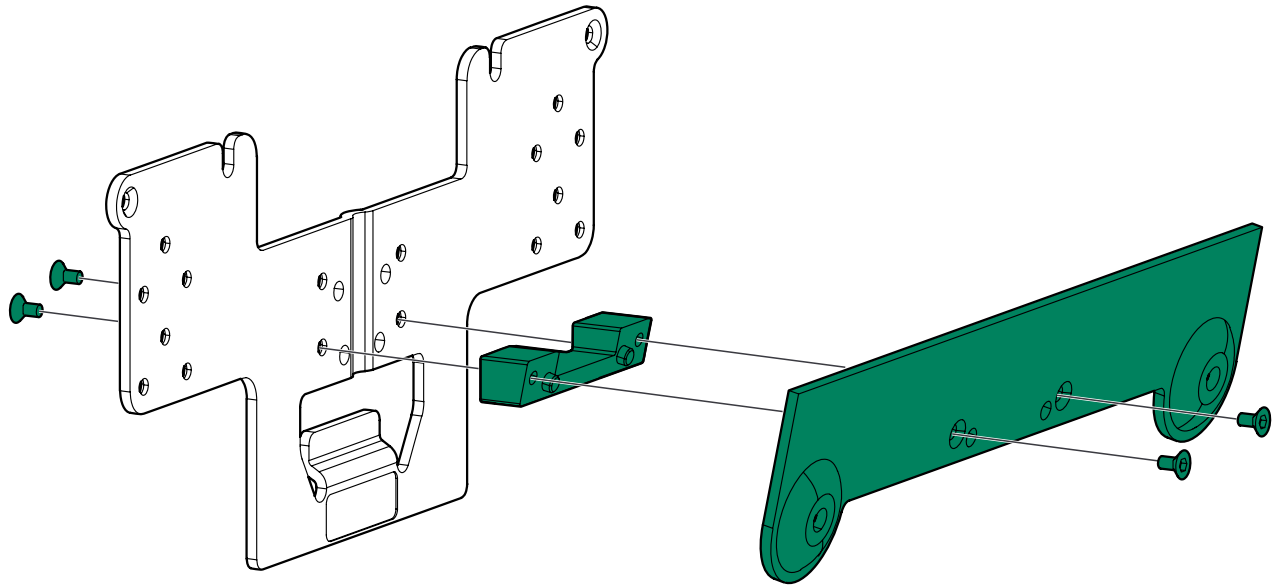


2. Install the mounting bracket to Rally Bar Mini with the supplied screws (2 pcs).

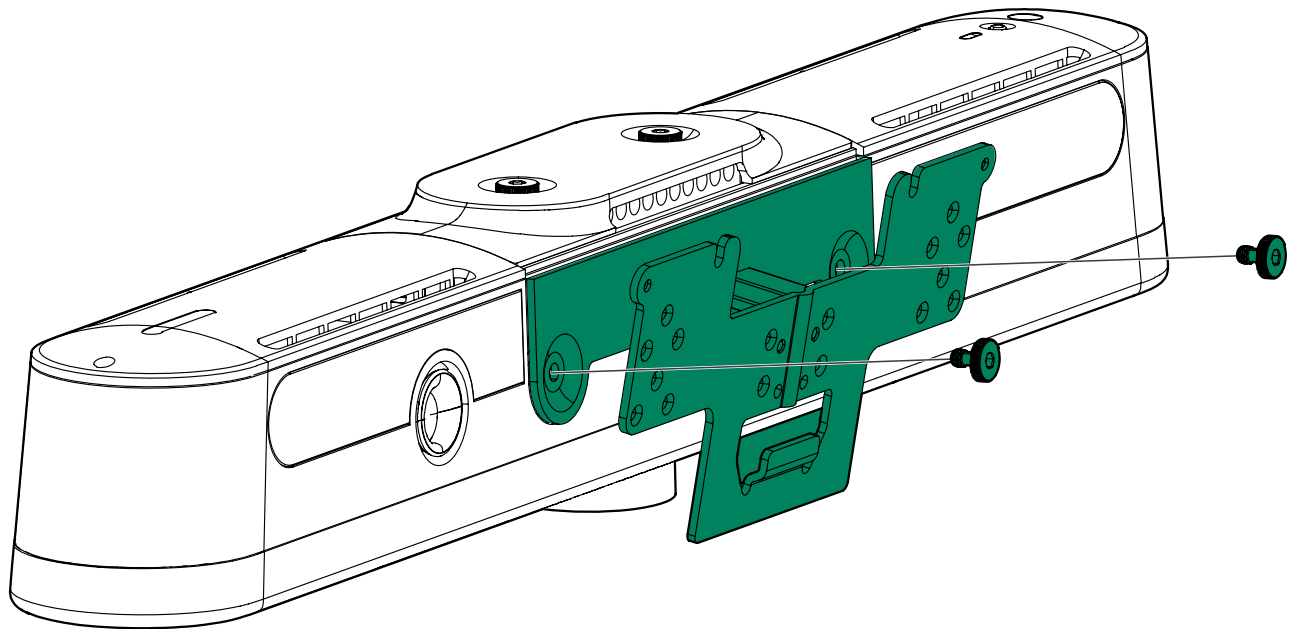





3. Install Rally Bar Mini to the TV mount with the supplied screws (2 pcs).

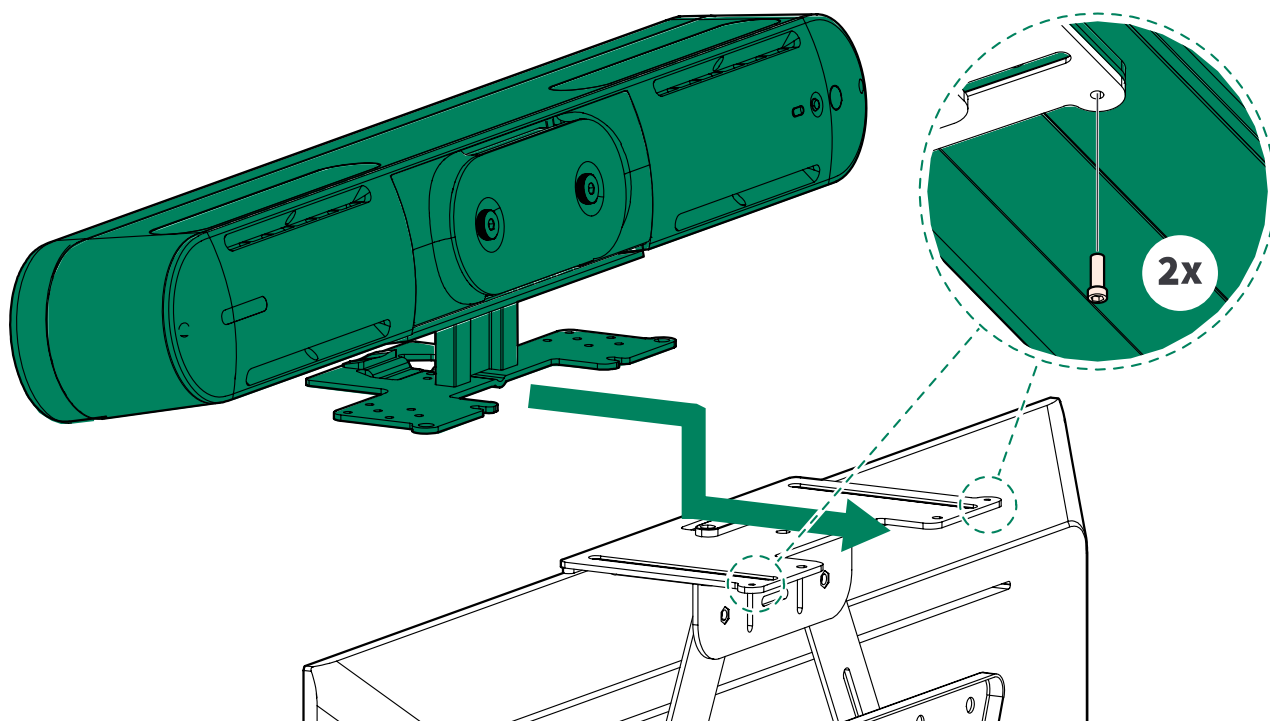

4. Remove the screws (2 pcs) from the back of the video bar and open the rear panel.

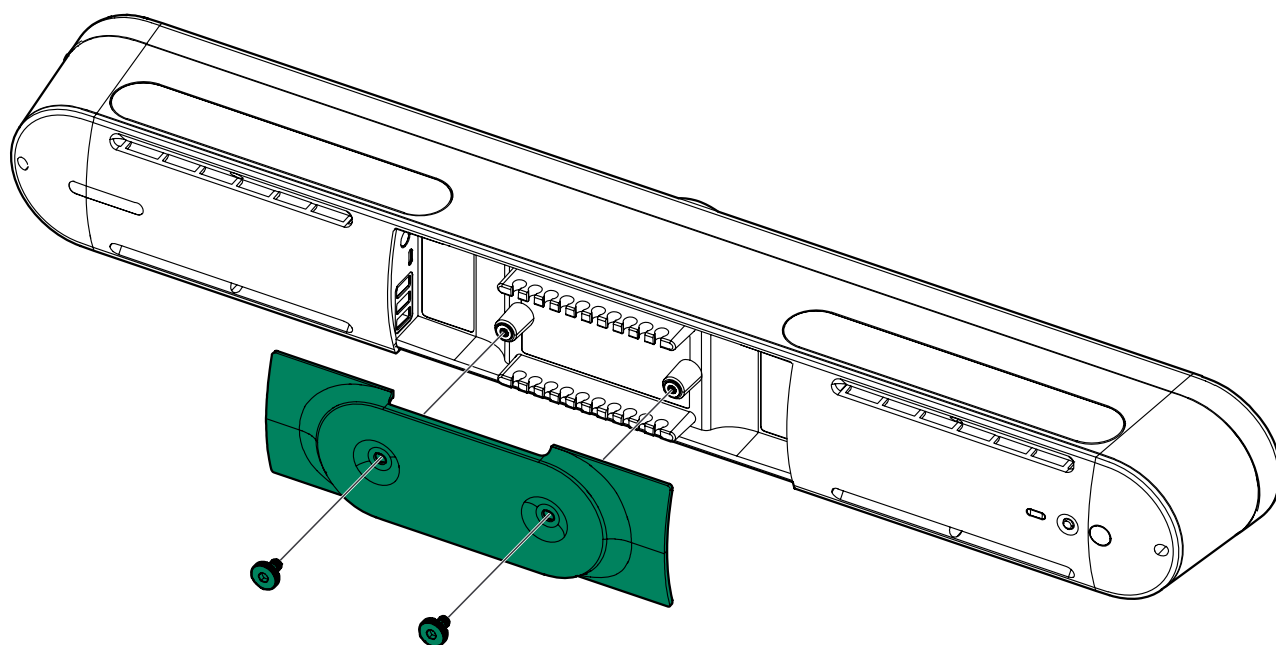


5. Connect a HDMI cable to Rally Bar Mini.

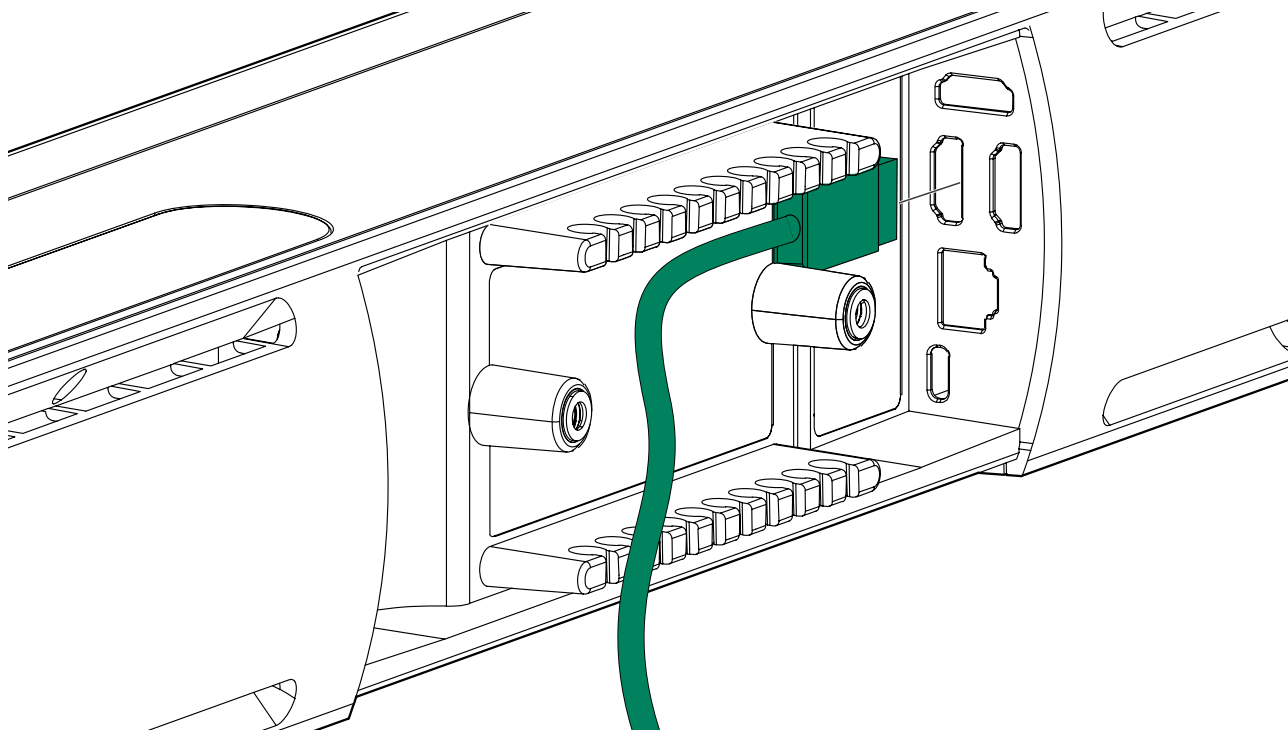


6. Connect the dongle transceiver to Rally Bar Mini.




**Note:** The dongle transceiver is later used to connect Rally Bar Mini to Logitech Tap.

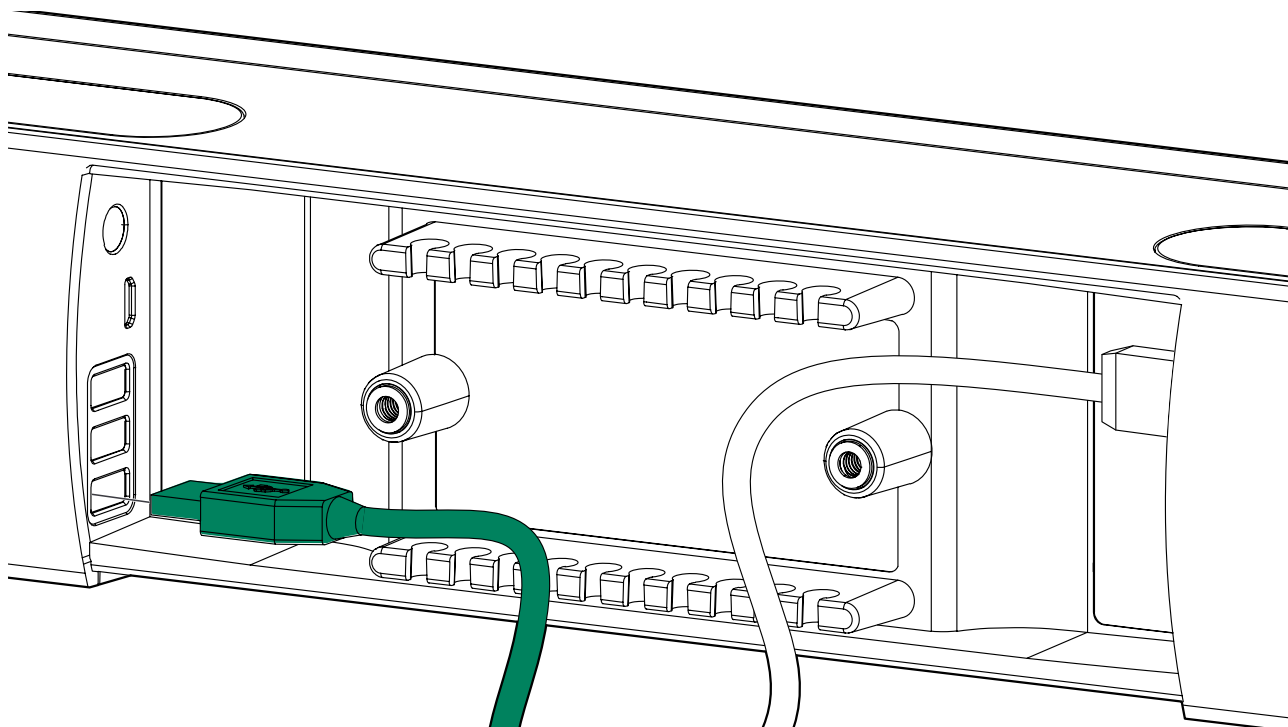

7. Connect the power supply to Rally Bar Mini.

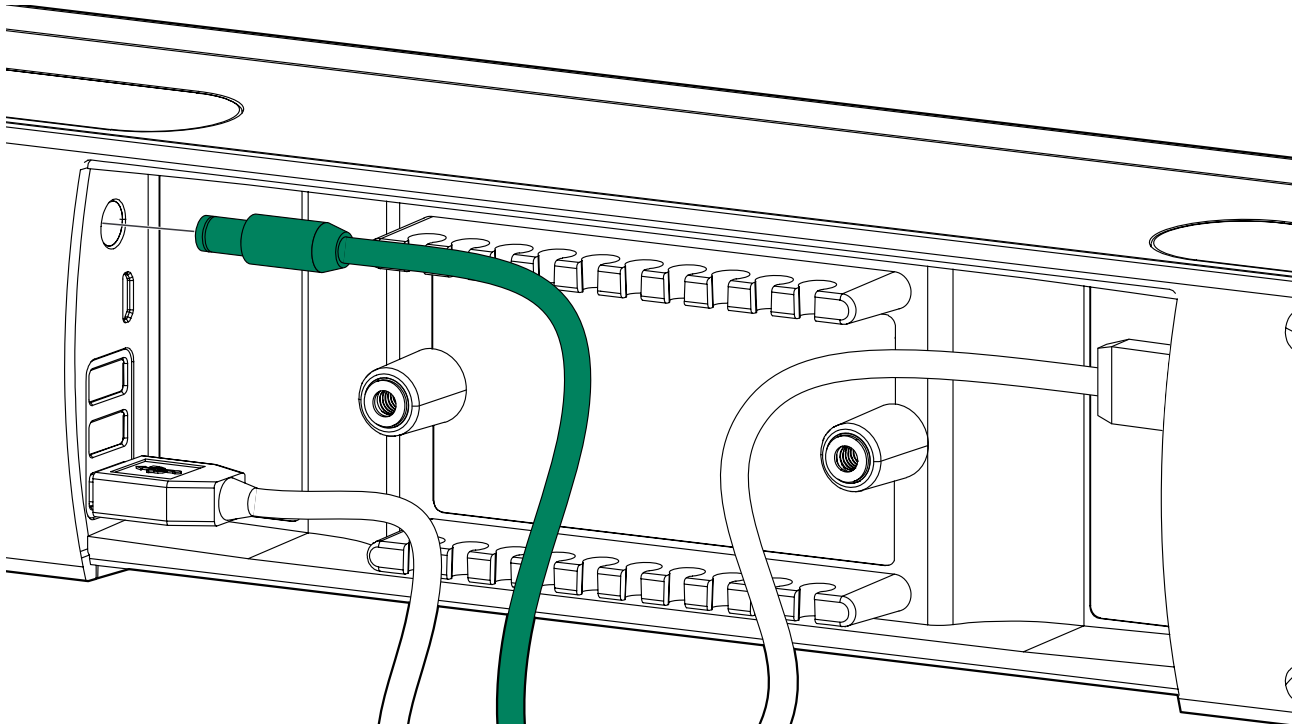

8. Attach the rear panel cover with the screws (2 pcs).

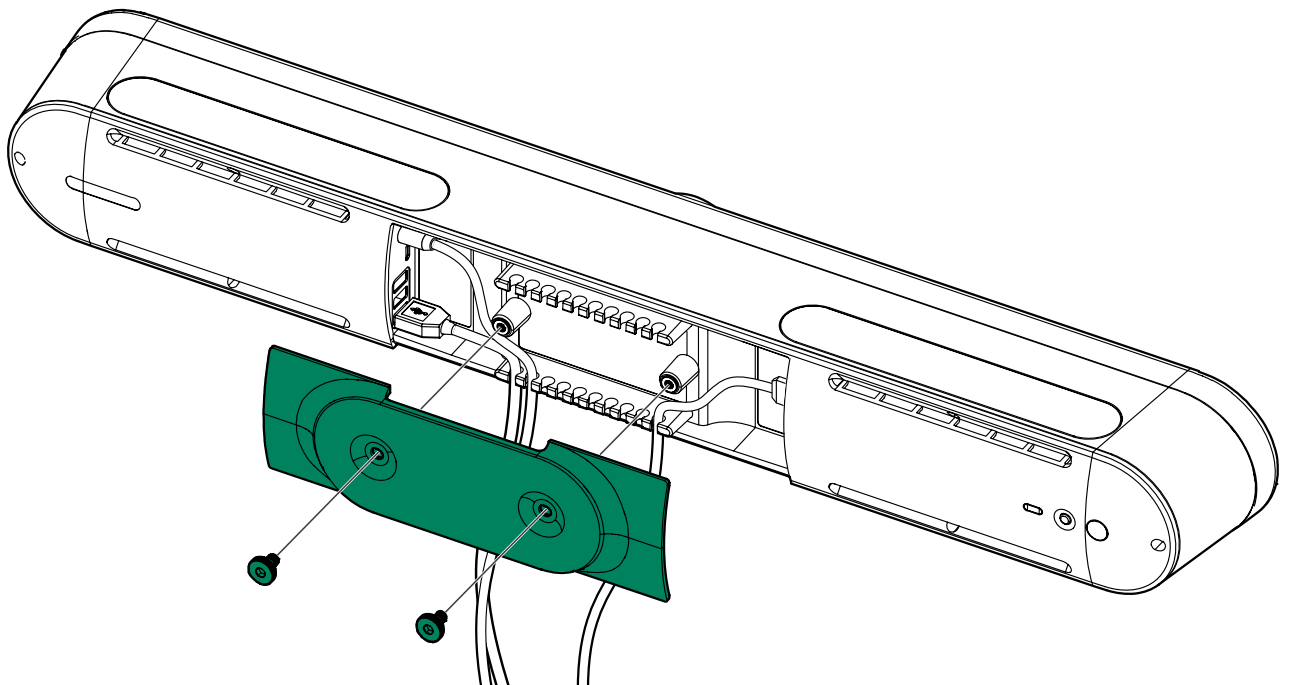

9. Connect Rally Bar Mini to the HDMI port of the display.




**Note:** If your video meeting application is not supported by the video bar, connect the video bar to the meeting room computer instead.

10. Connect the power supply to a power outlet under the table.


## 2.3 Install the display

1. Connect the power cord to the display.
2. Install the display bracket to the wall bracket.

ⓘ **Note:** Make sure that the latch is locked in place.

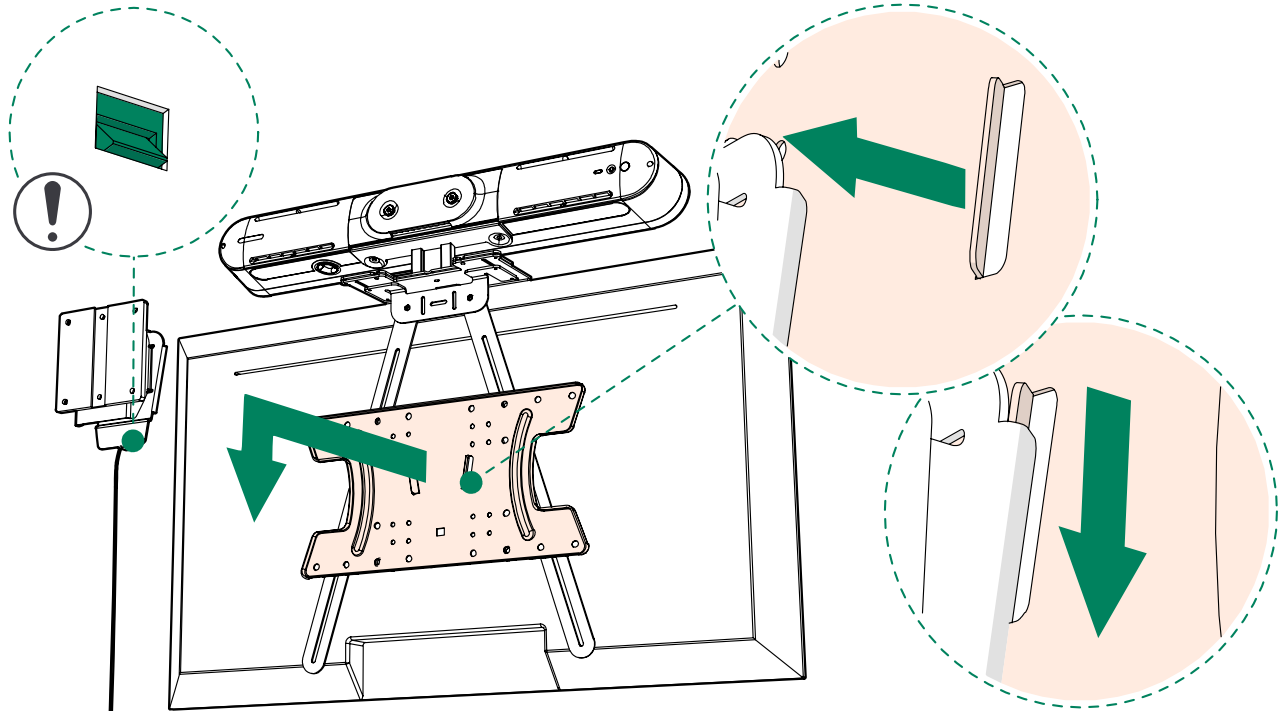


3. Connect the power cord to the GST splitter under the table.

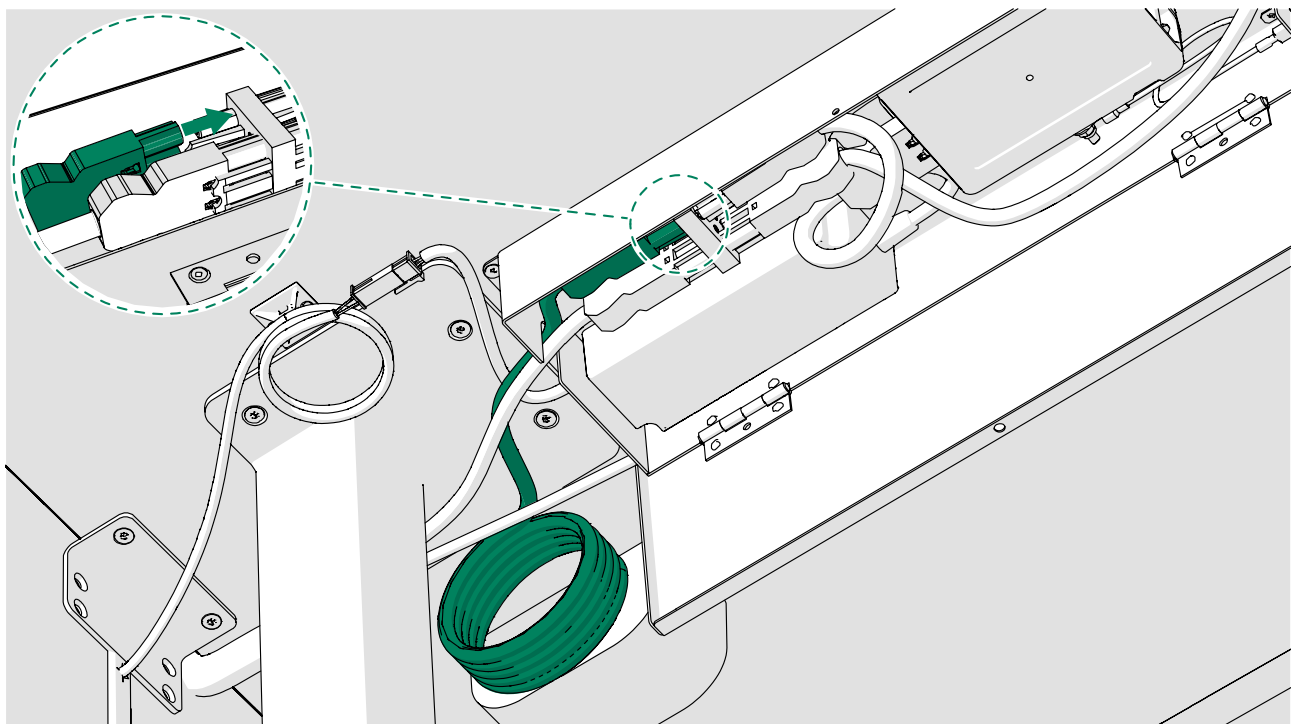

## 3 Lounge

This section contains instructions that are specific to Framery 2Q Lounge.

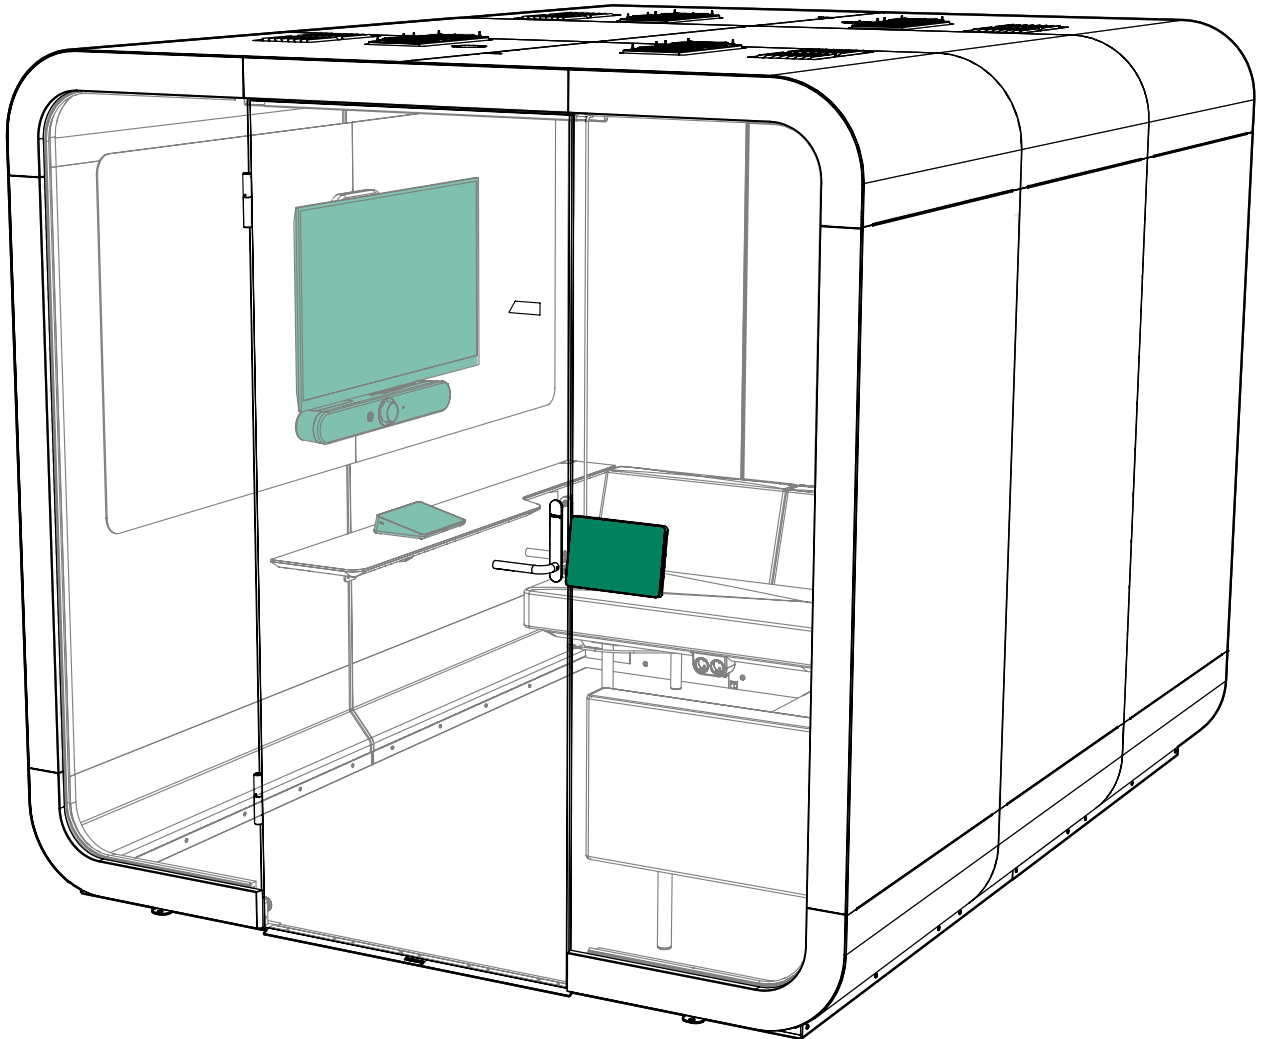

### 3.1 Install the TV Mount for Video Bars

1. Position TV Mount for Video Bars on the back of the display with the display mounting bracket resting on top of the TV mount.




**Note:** Rally Bar Mini is installed below the display. Make sure that the TV mount is oriented correctly.


2. Install the display mounting bracket and TV mount to the display with the supplied nuts (4 pcs).

⚠ **Note:** Make sure that the display bracket is in the center of the display.


⚠ **Note:** Make sure that the square hole on the display bracket is at the lower end of the bracket.

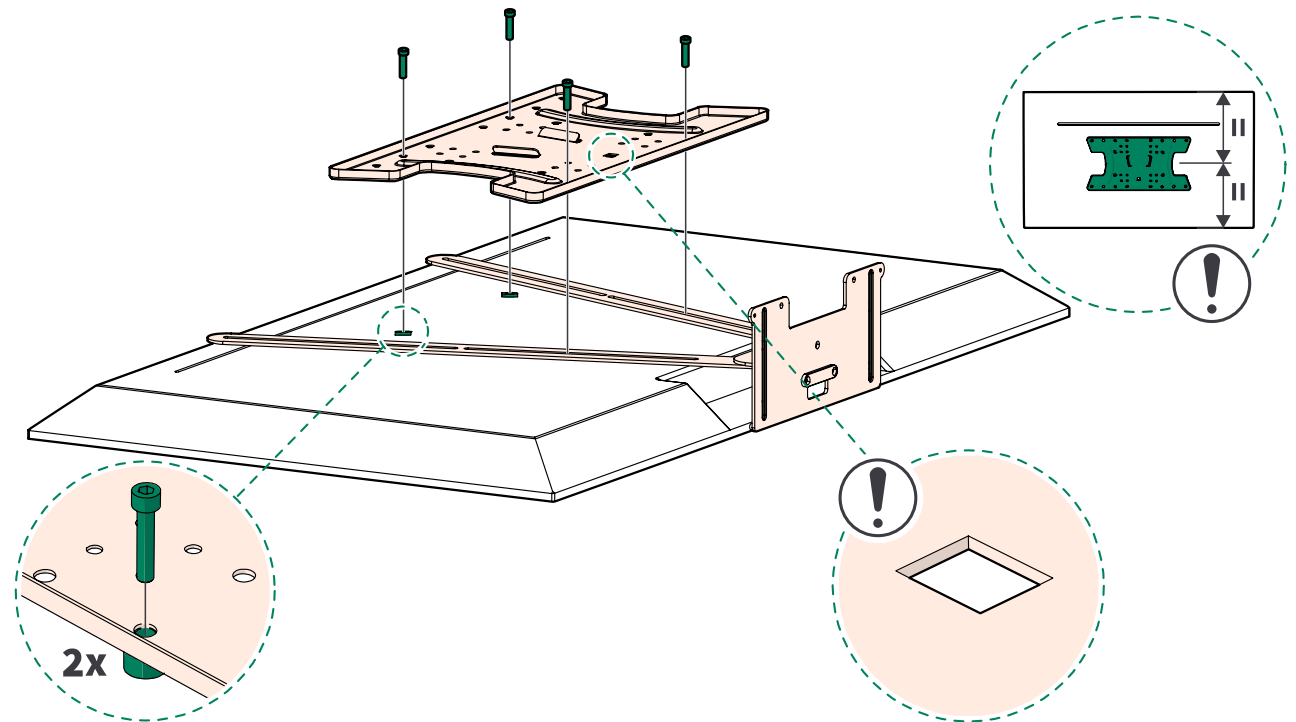

3. Align the TV mount with the front of the display.

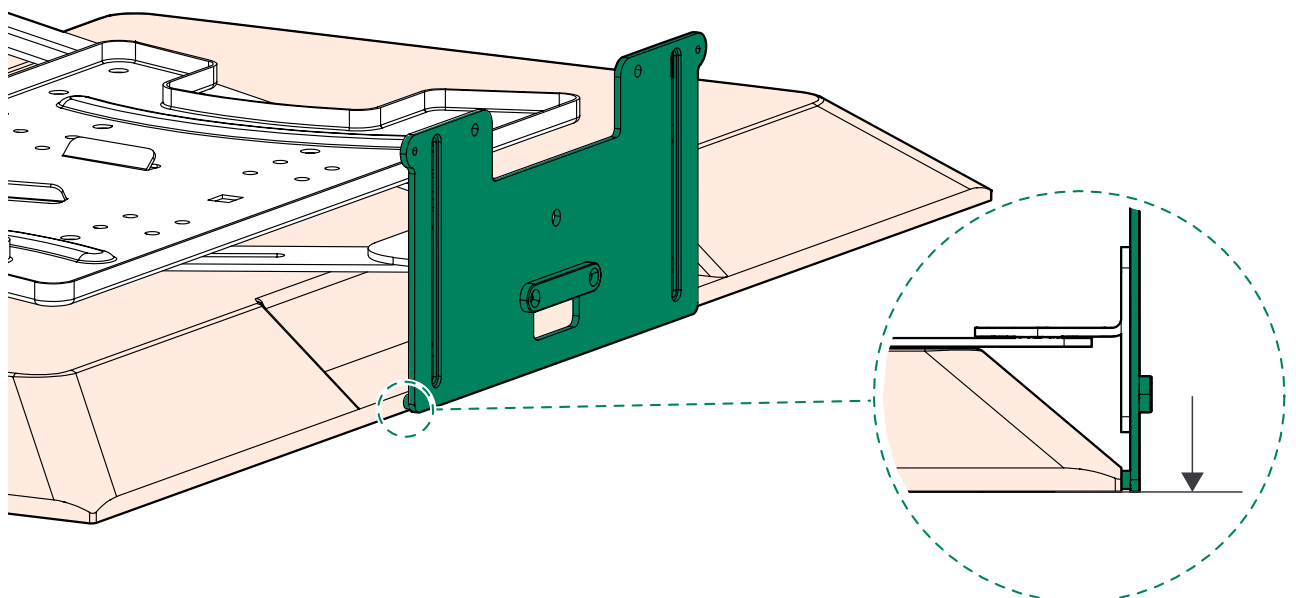


4. Assemble the mounting bracket for Rally Bar Mini.

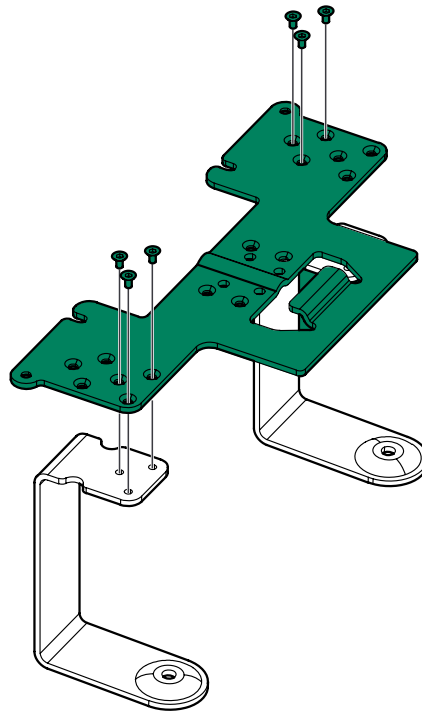

5. Install the mounting bracket to the TV mount with the supplied screws (2 pcs).




**Note:** These screws are later used to adjust the the tilt of the video bar. Install the screws but do not tighten them completely.

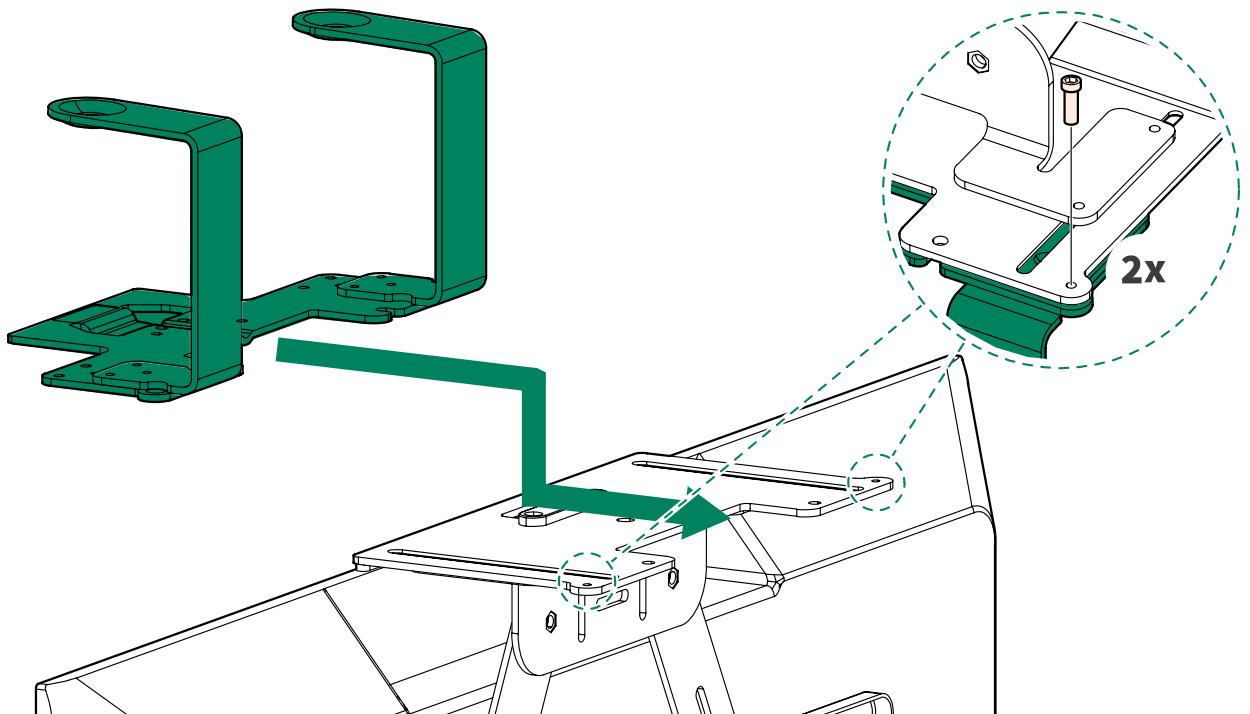


### 3.2 Install Rally Bar Mini

1. Remove the screws (2 pcs) from the back of the video bar and open the rear panel.

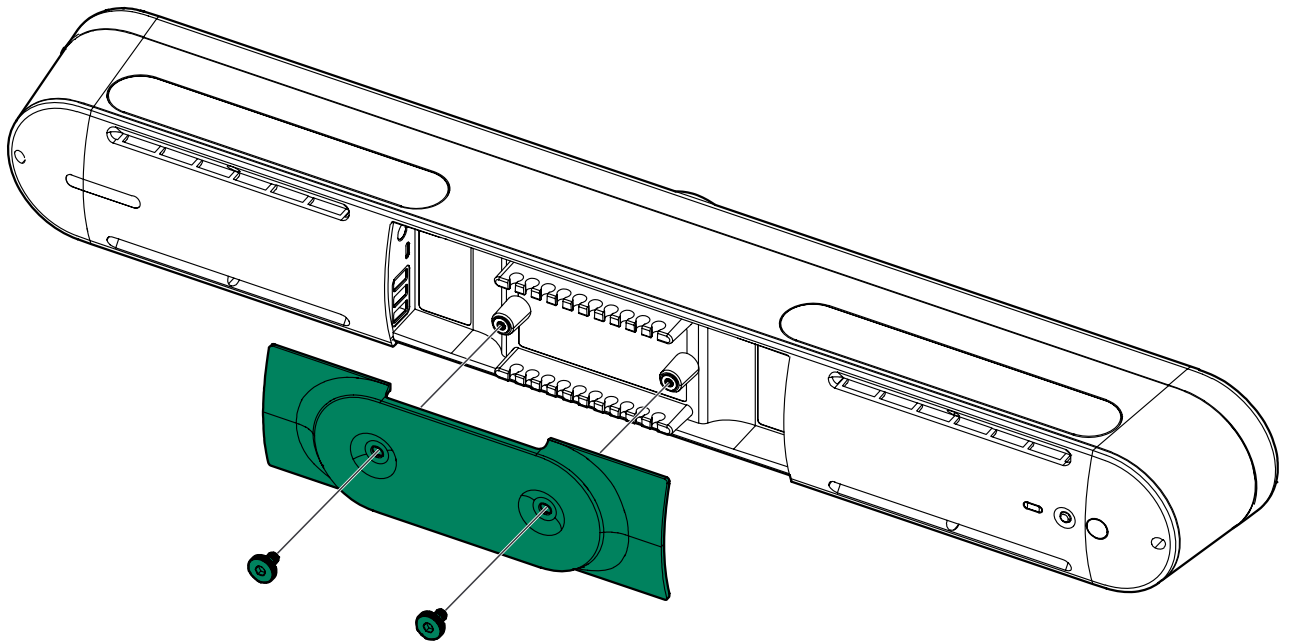


2. Connect a HDMI cable to Rally Bar Mini.

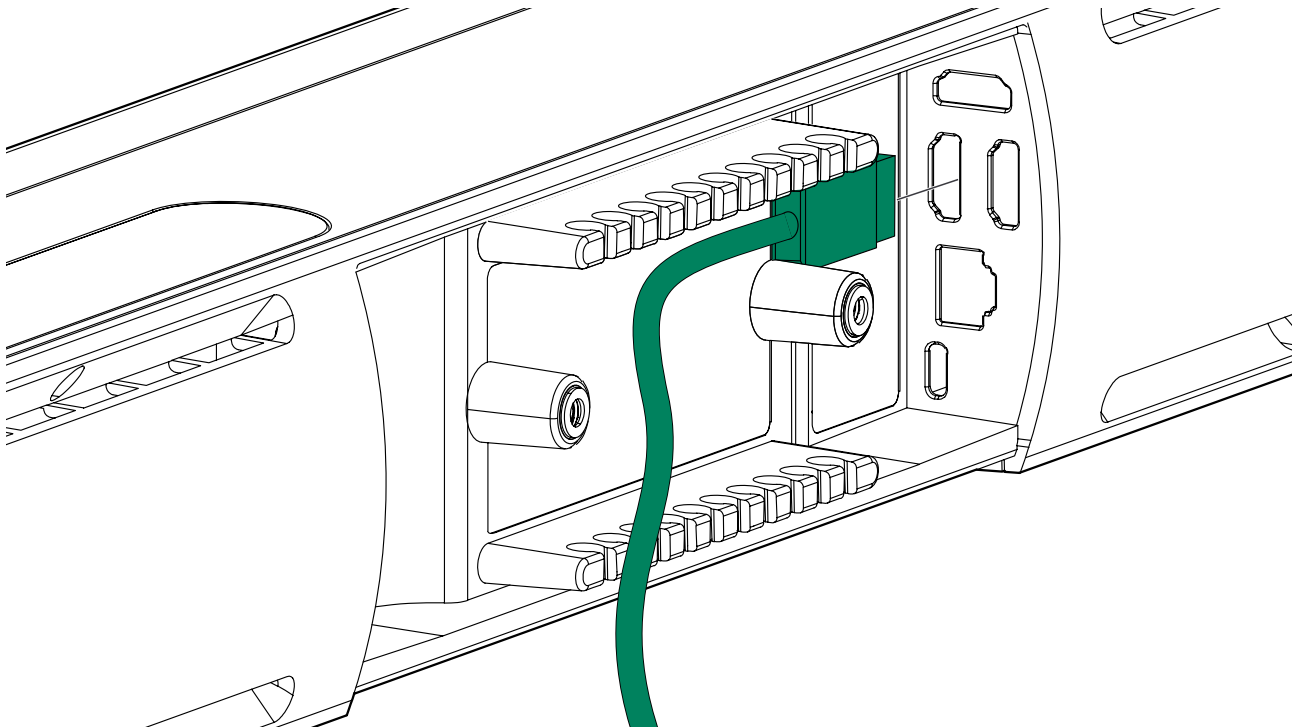




3. Connect the dongle transceiver to Rally Bar Mini.


⚠ **Note:** The dongle transceiver is later used to connect Rally Bar Mini to Logitech Tap.

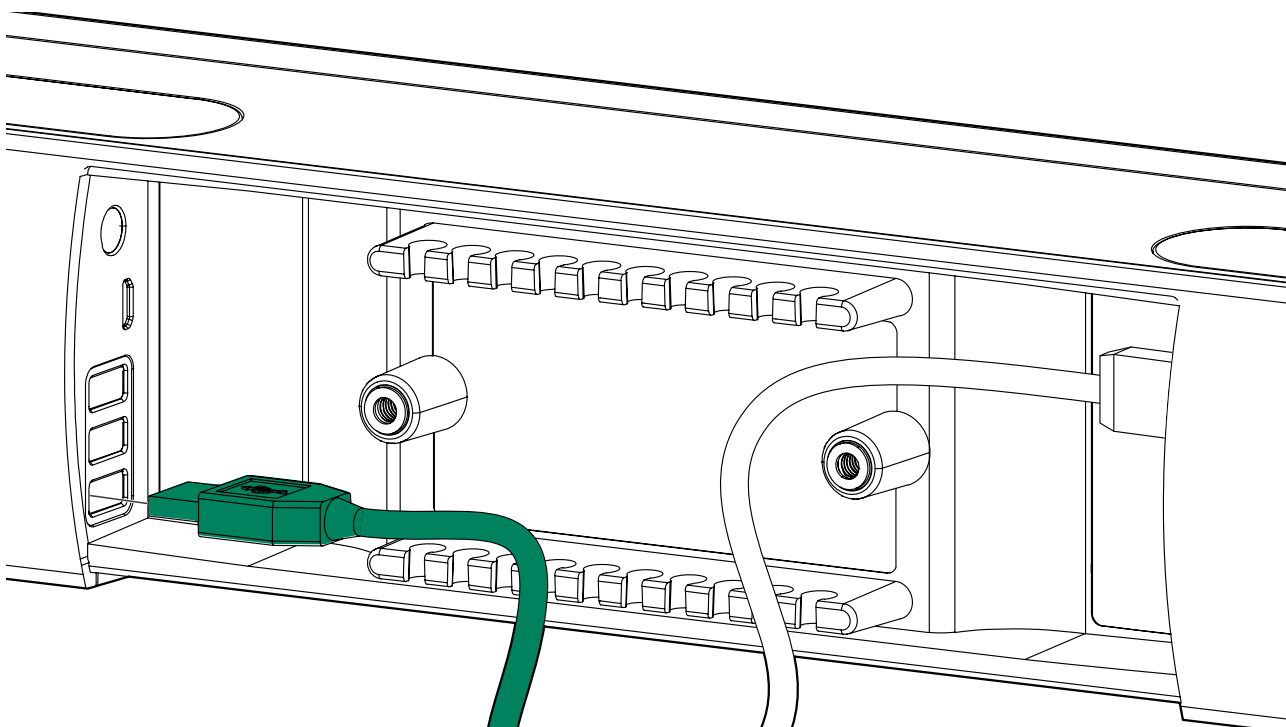


4. Connect the power supply to Rally Bar Mini.

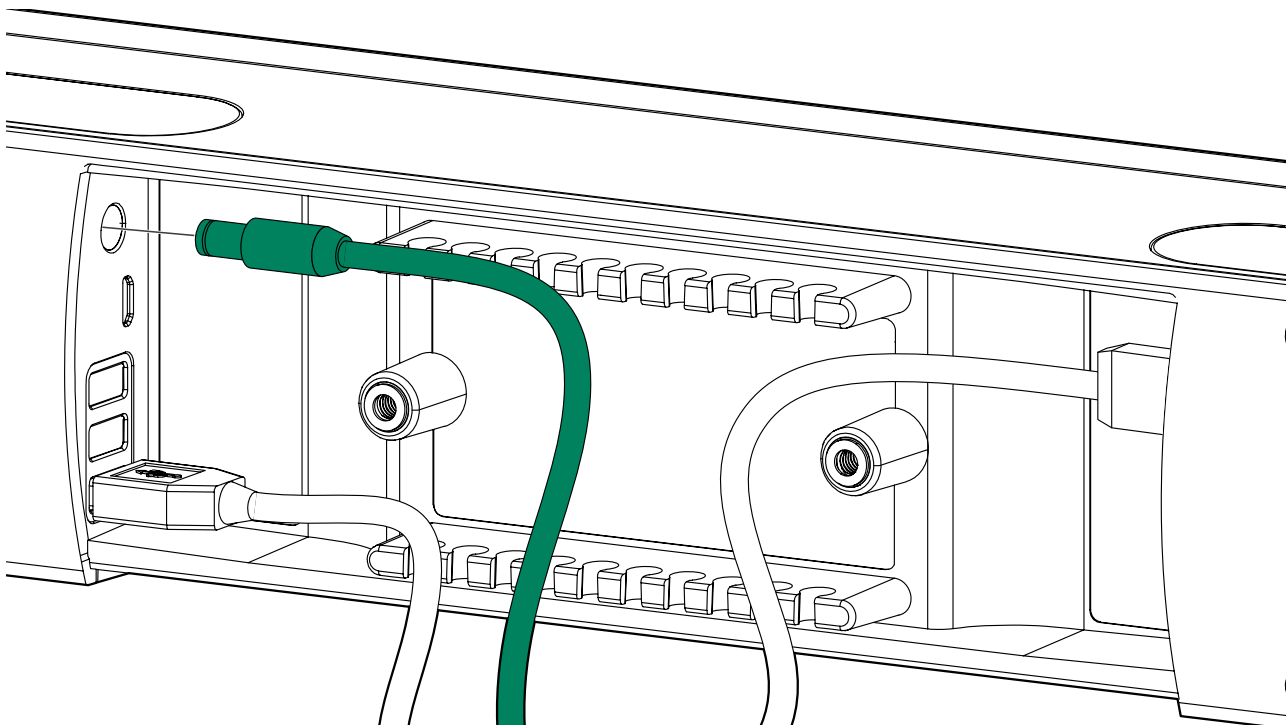

5. Attach the rear panel cover with the screws (2 pcs).

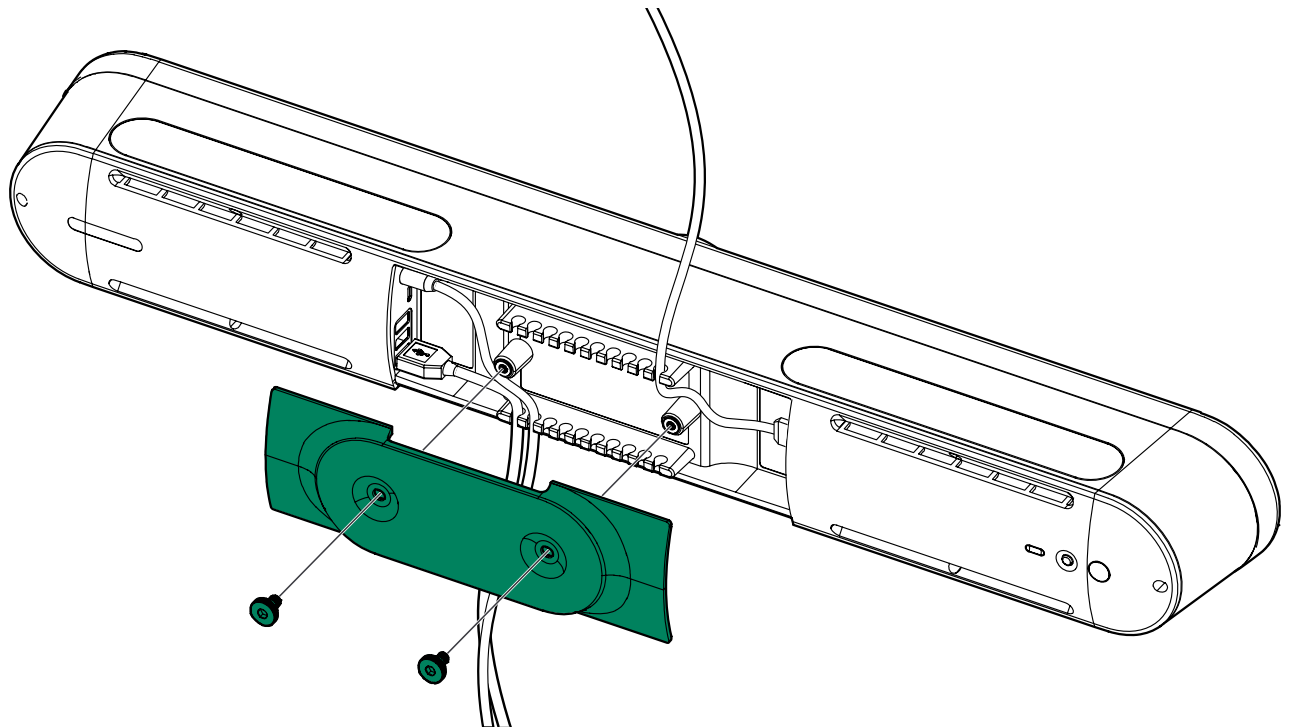

6. Install Rally Bar Mini to the TV mount with the supplied screws (2 pcs).

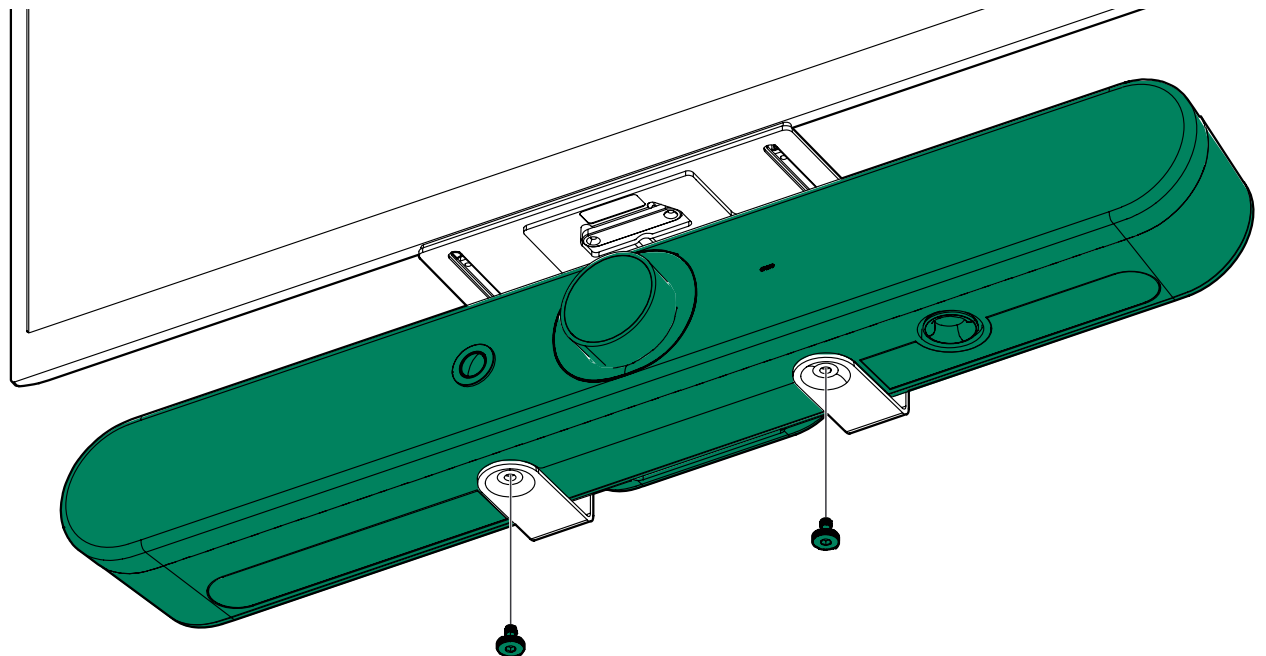

7. Connect Rally Bar Mini to the HDMI port of the display.




**Note:** If your video meeting application is not supported by the video bar, connect the video bar to the meeting room computer instead.

8. Connect the power supply to a power outlet under the table.

### 3.3 Install the display

1. Connect the power cord to the display.
2. Install the display bracket to the wall bracket.

ⓘ **Note:** Make sure that the latch is locked in place.

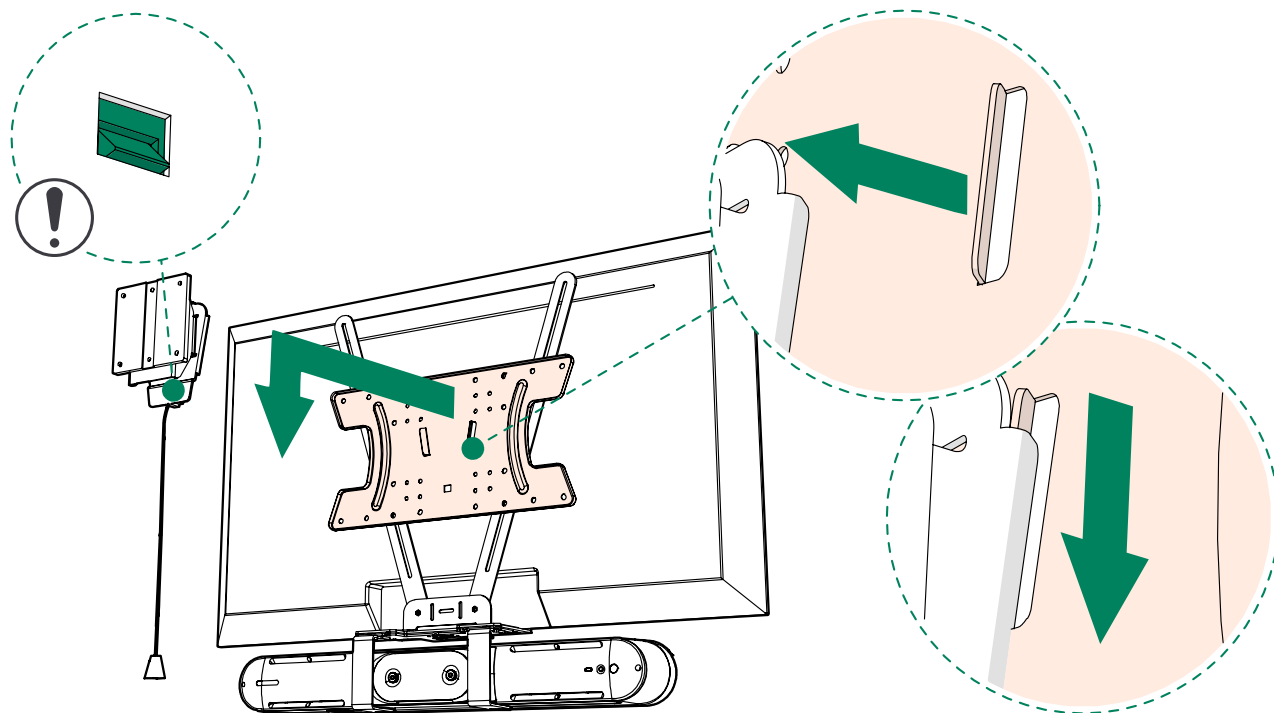


3. Connect the power cord to the power outlet under the table.

## 4 Tap

### 4.1 Install Tap meeting room touch controller

Tap meeting room touch controller is connected to Rally Bar Mini or the meeting room computer with the Cat5e Kit. The kit consists of a Tap Receiver that connects Tap to a dongle transceiver through a power supply. The dongle transceiver is connected to the USB port of the video bar or the meeting room computer depending on the meeting room configuration.


1. Remove the two screws from the back of the Tap and remove the bottom cover.

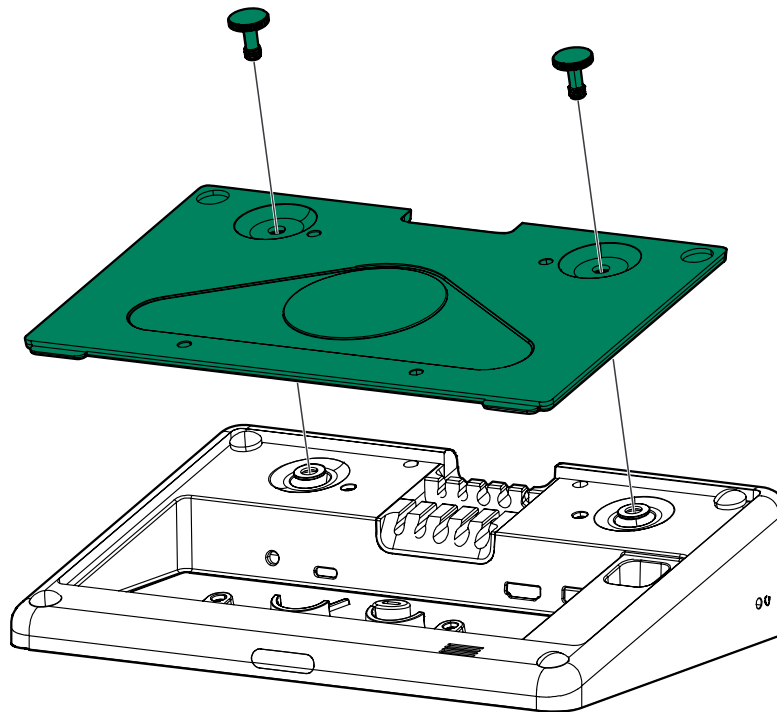


2. Connect the Tap Receiver into the USB-C connector on the bottom of the Tap.




**Note:** Slide the Tap Receiver gently into the slot on the bottom of the touch controller.

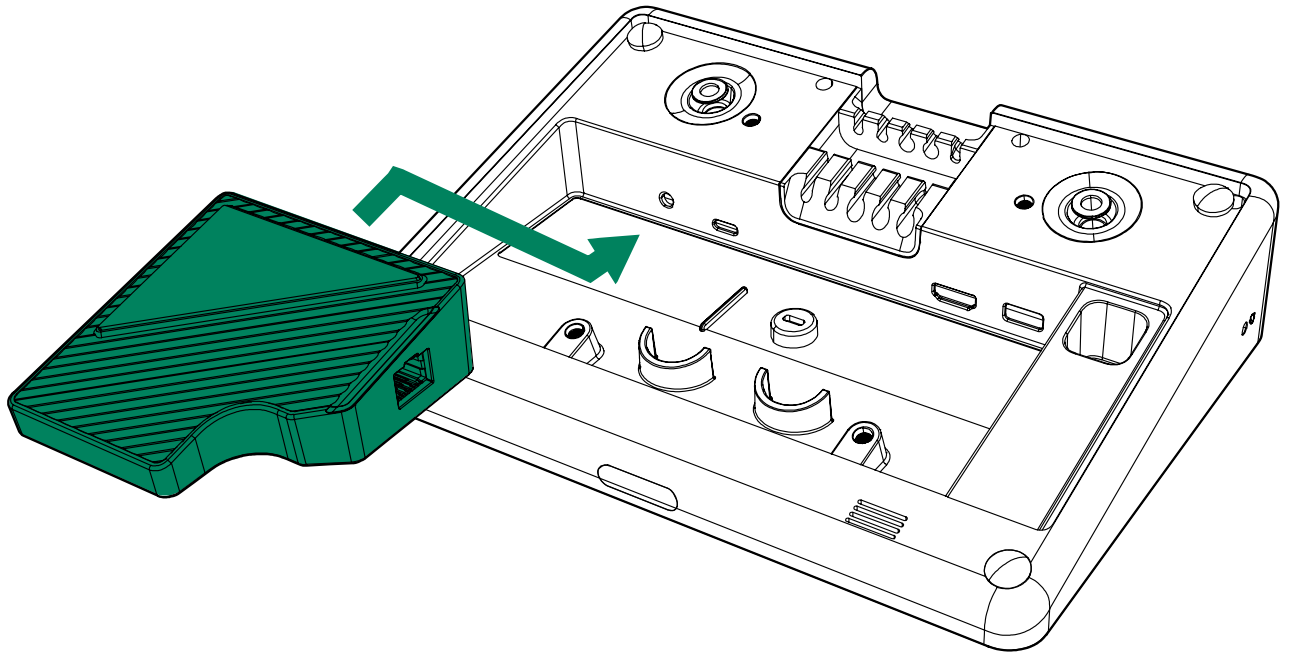


3. Connect a LAN cord to the Tap Receiver and route it out through a slot on the back of the touch controller.

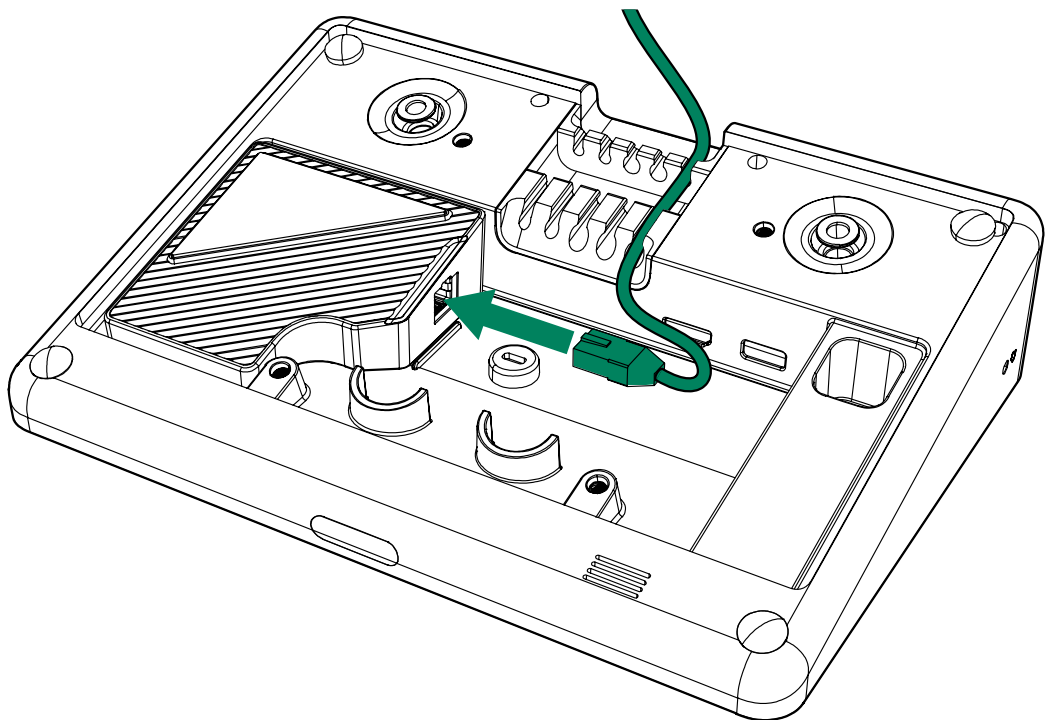


4. Attach the bottom cover with two screws.

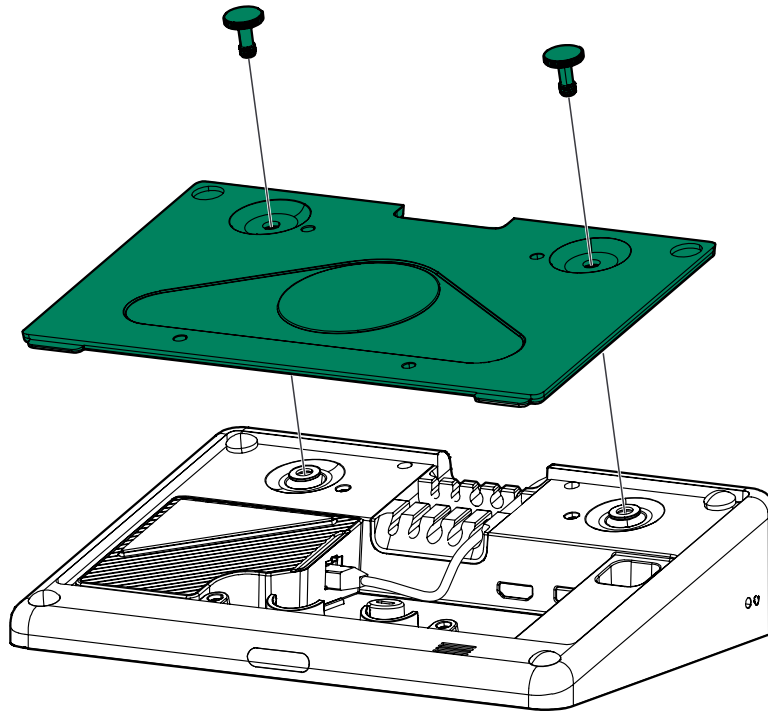

5. Connect the LAN cord from the Tap Receiver to the OUT port of the power supply.

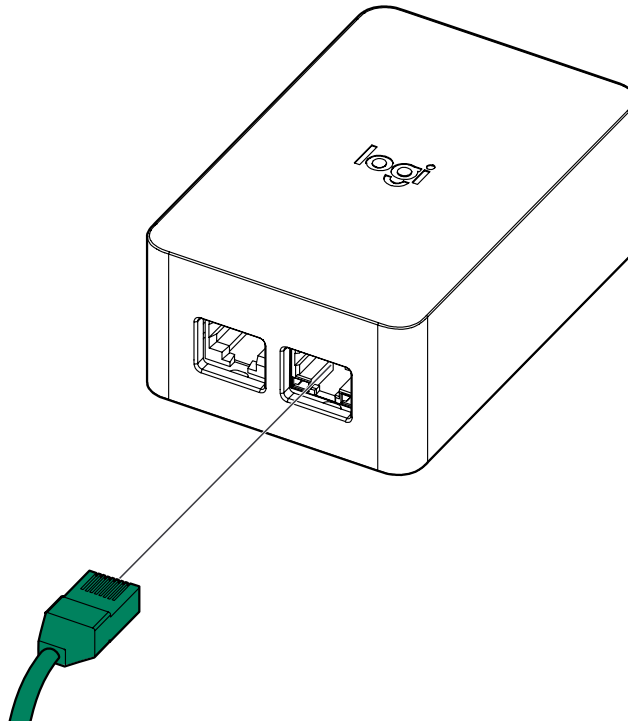


6. Connect a second LAN cord to the IN port of the power supply.

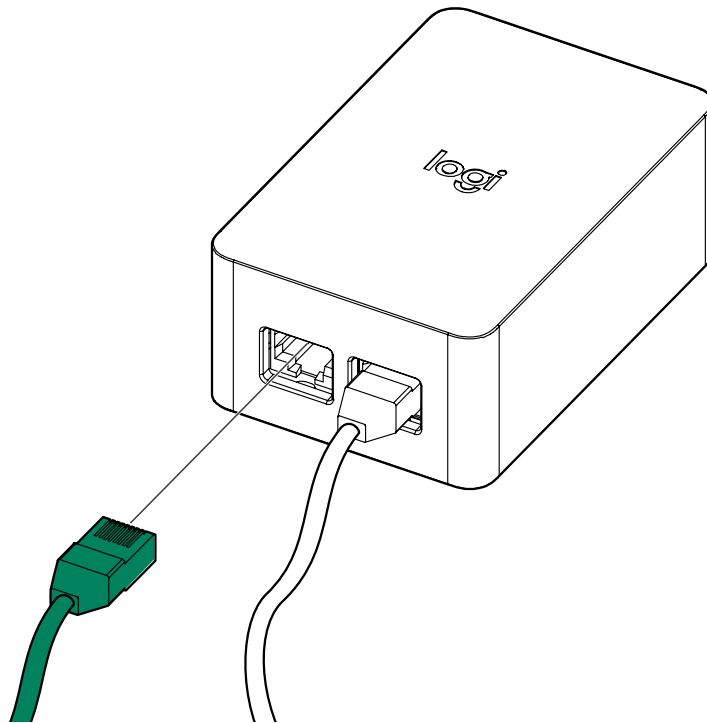


7. Connect the second LAN cord to the dongle transceiver.



**Note:** If Rally Bar Mini is installed according to these instructions, the dongle transceiver is already connected to the USB port on the video bar.

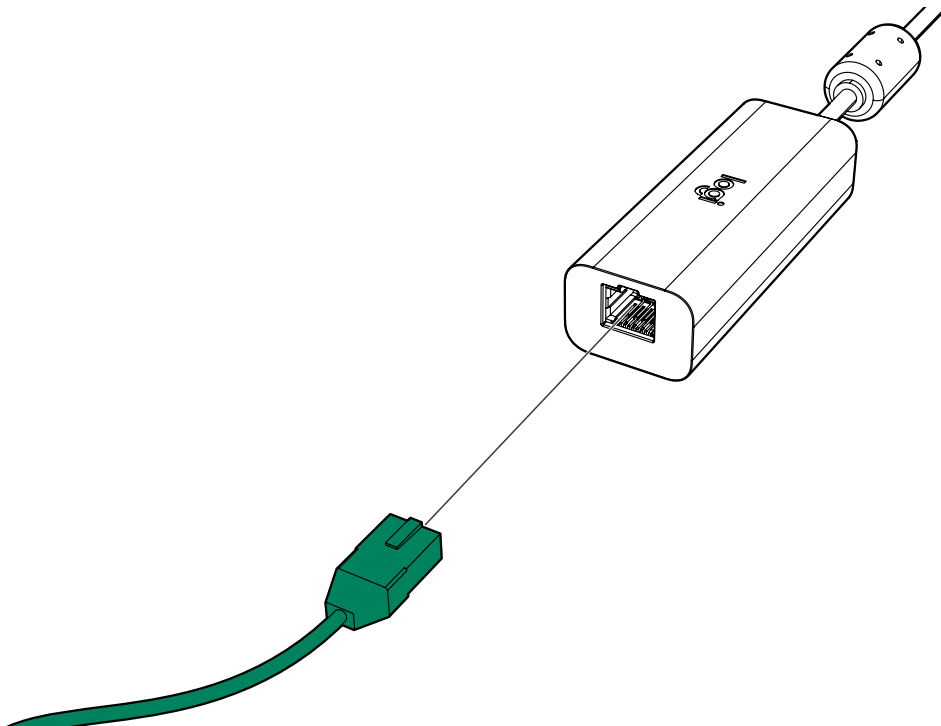

8. Attach a plug adapter to the power supply and connect it to a power outlet.

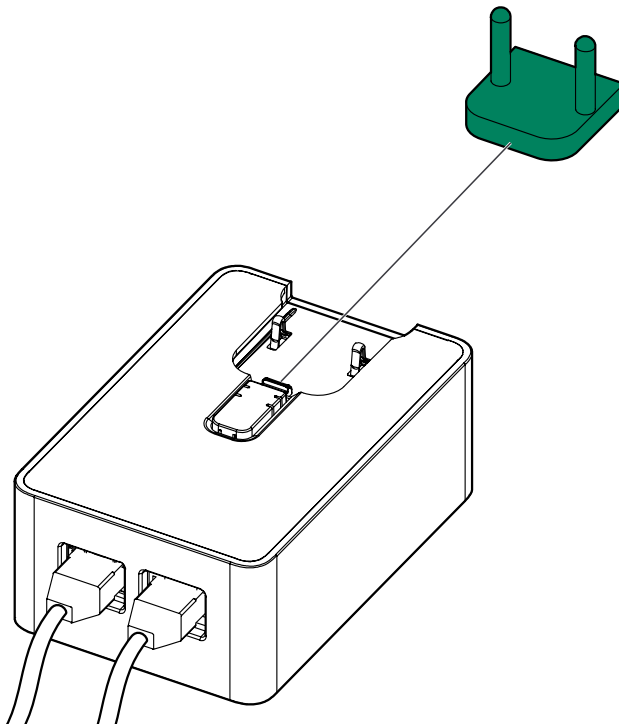




## 5 Tap Scheduler

### 5.1 Routing of the Tap Scheduler LAN cord


Tap Scheduler is powered over Ethernet (PoE) using a LAN cord. The LAN cord is routed to the booking system bracket during pod installation.

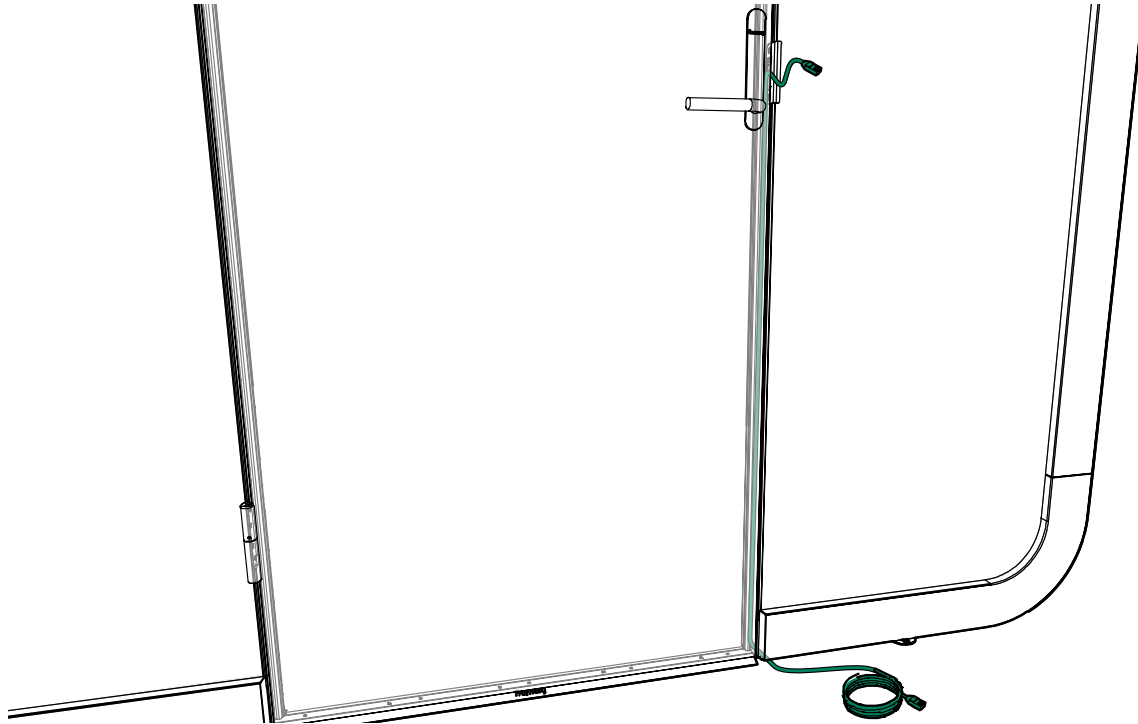


### 5.2 Install Tap Scheduler to the booking system bracket

Tap Scheduler is installed outside the pod on the wooden back plate of the booking system bracket using a multi-surface mount.


1. Position the multi-surface mount on the wooden back plate and mark the location of each screw hole with a pencil.

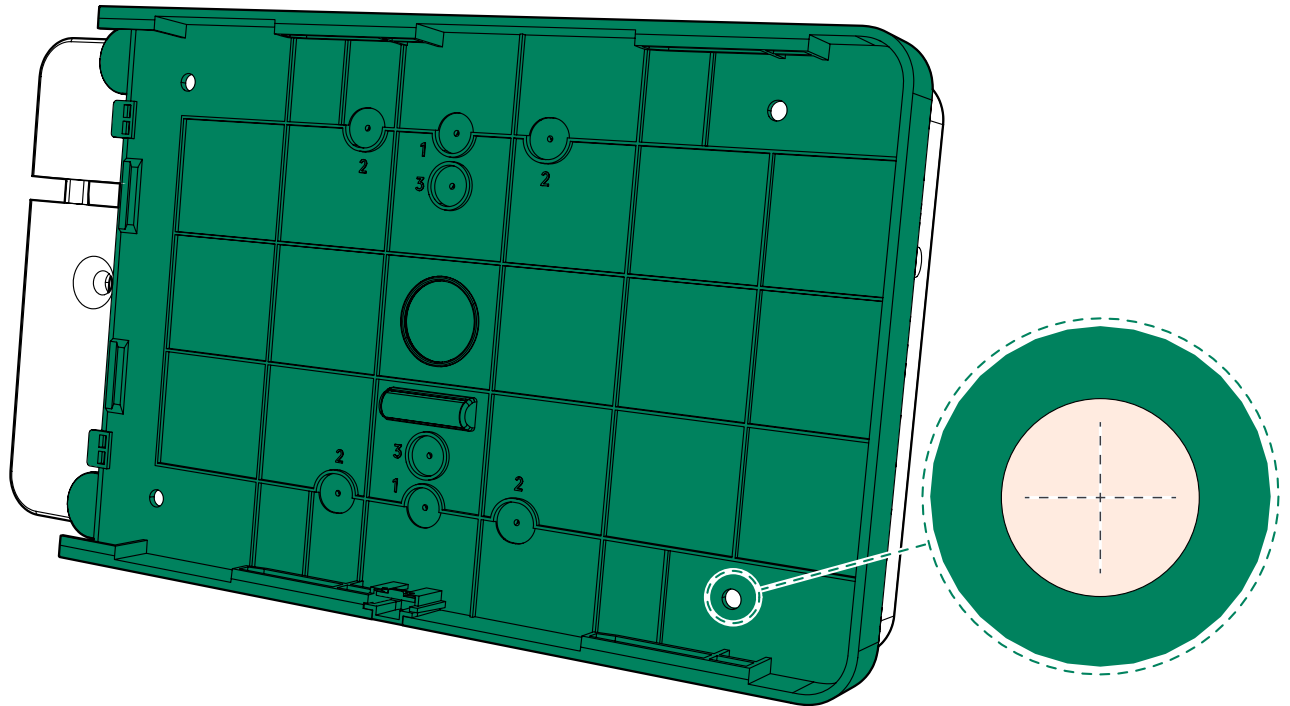


2. Drill holes for attaching the multi-surface mount on the wooden back plate.
3. Insert wall plugs into the holes.

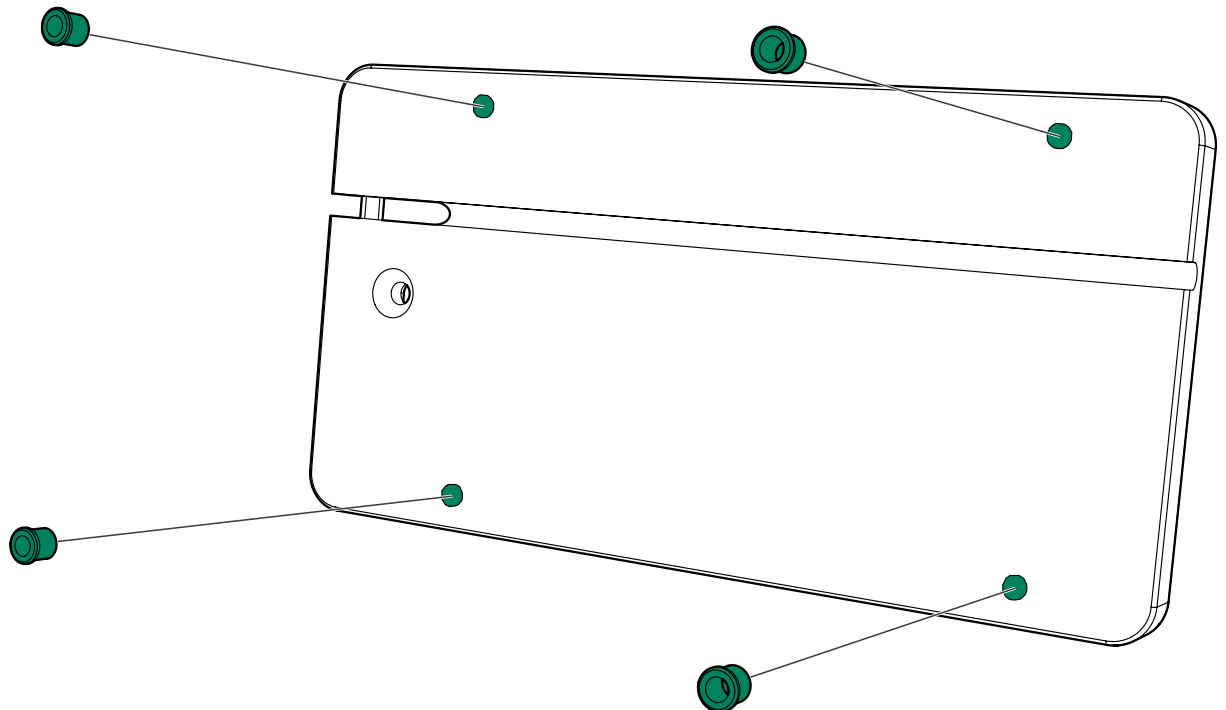


4. Secure the multi-surface mount on the back plate with 3.5x12 screws (4 pcs).

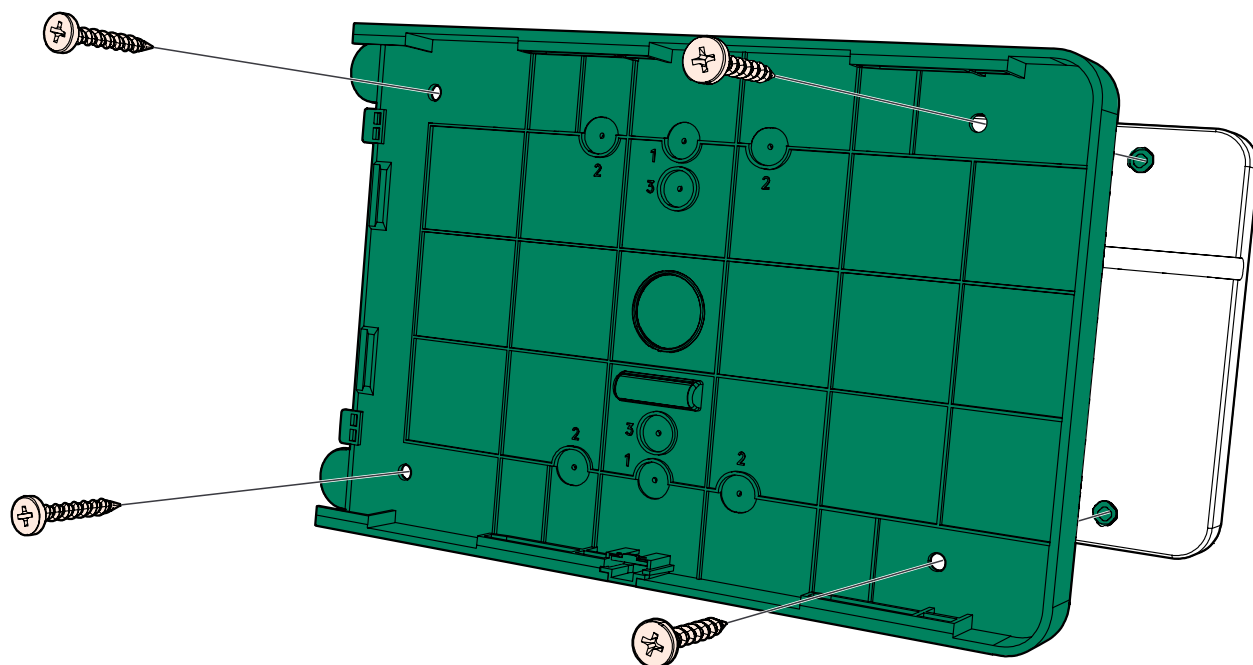

5. Route the LAN cord through the side of Tap Scheduler and connect it to the PoE port on the back of the device.

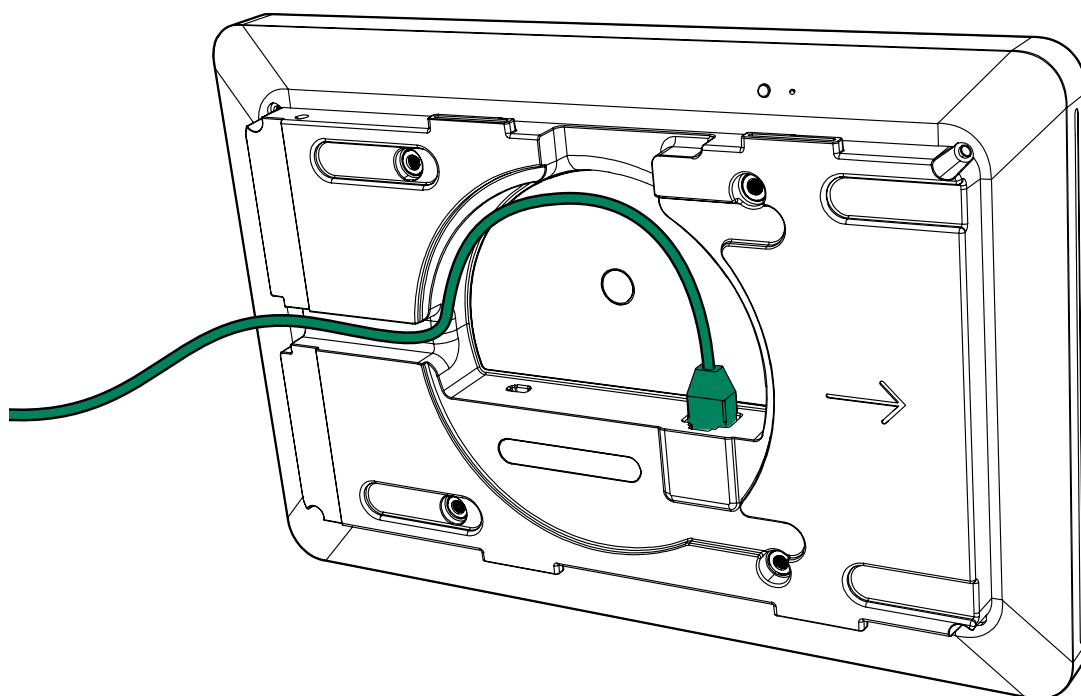


- Slide Tap Scheduler in place on the multi-surface mount.

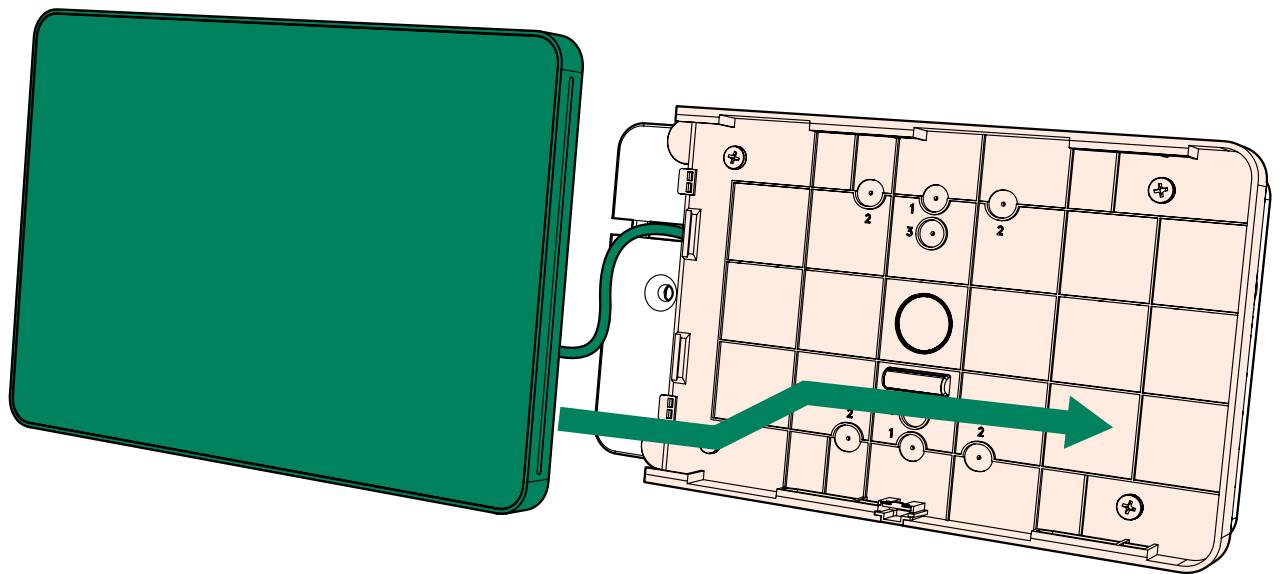

- Insert the mount cover on the side of the multi-surface mount with the supplied screws (2 pcs).

⚠ **Note:** Before installing the mount cover, remove the small plug from the edge of the cover. This creates a slot for the LAN cord.

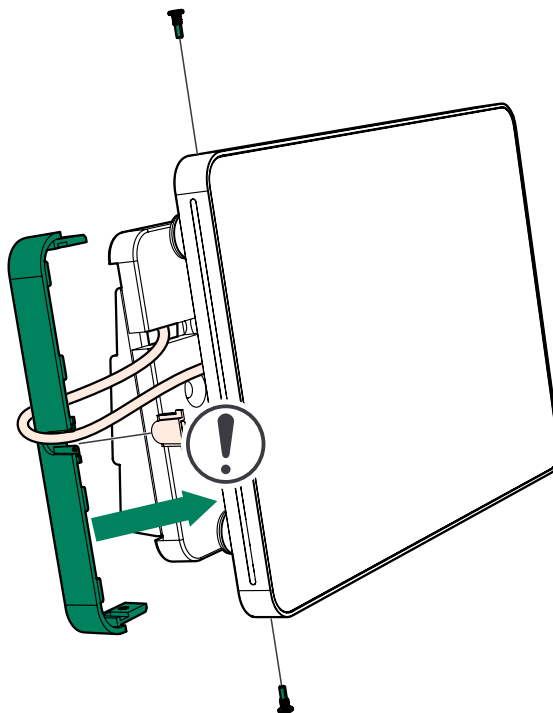



**framery**

Framery 2Q  
Logitech Installation Instructions  
Patamäenkatu 7  
33900 Tampere  
FINLAND  
VAT: FI 23527139