

# framery

SERIOUS ABOUT HAPPINESS



Framery One  
Adjusting the door

English  
Version 1.0

Tampere, Finland 12.3.2021



# Contents

<b>1 Important safety and product instructions.....</b>	<b>5</b>
1.1 Preface.....	5
1.2 Product information.....	5
1.3 Copyright.....	5
1.4 Manual contents.....	5
1.5 Manual contents.....	5
1.6 Intended use.....	5
1.6.1 Non-conventional use.....	6
1.6.2 Ambient conditions for use.....	6
1.7 Warning, information and safety symbols in this manual.....	6
1.8 Main safety risks related to the installation, maintenance, disassembly and use of the product.....	7
1.8.1 Installation, maintenance and disassembly.....	7
1.8.2 Electrical safety.....	7
1.8.3 Fire safety.....	8
1.8.4 Lifting safety.....	9
1.8.5 Use.....	9
1.8.6 Moving the product on wheels (optional).....	10
1.8.7 Radio frequency.....	11
1.9 Location of product markings.....	12
<b>2 Tools and accessories.....</b>	<b>14</b>
<b>3 Adjust the door closing force.....</b>	<b>15</b>
<b>4 Adjust the door height.....</b>	<b>18</b>
4.1 Raise the door.....	18
4.2 Lower the door.....	21
<b>5 Adjust the horizontal alignment of the door.....</b>	<b>24</b>



# 1 Important safety and product instructions

## 1.1 Preface

This instruction manual describes the installation of the product. Everyone involved in installing the product must read and understand the contents of the installation and safety instructions.

This instruction manual gives you necessary information for the correct installation of the product.

## 1.2 Product information

The information in this manual corresponds to the product at the time of delivery. All information included in this manual is valid at the time of publication.

## 1.3 Copyright

This document must not be copied, presented, or delivered to a third party without explicit permission from Framery. The use of this document for any purpose other than those allowed by Framery is prohibited. Framery reserves the right to change the instructions related to the product without separate notice.

## 1.4 Manual contents

The installation instructions contain the following information:

- General information about the purpose and content of the instructions
- Information related to safety
- Instructions for changing the door handedness

## 1.5 Manual contents

The instructions contain the following information:

- General information about the purpose and content of the instructions
- Information related to safety
- Instructions for adjusting the door

## 1.6 Intended use

The Framery One is a pod intended for short term indoor commercial and household use by one (1) person at a time.



### **Warning:**

**WARNING** –To reduce the risk of burns, fire, electric shock, or injury to persons:

Use this product only for its intended use as described in the user instructions. Do not use attachments not recommended by the manufacturer.

### 1.6.1 Non-conventional use

Any use or maintenance of the product that is not specifically allowed in the installation, maintenance, troubleshooting or user instructions is prohibited, including the following:

- Installation, maintenance or disassembly of the pod without reading and understanding the instructions for those actions
- Use of the pod beyond the limits of use
- Making alterations to the pod
- Using the pod in spite of obvious defects or damage
- Using the pod outdoors or in conditions where the temperature or air quality is not safe
- Climbing on top of the product or placing any load on the roof of the product
- Smoking in the pod

### 1.6.2 Ambient conditions for use

The pod is intended to be used in the following conditions:

- Ambient temperature: +15°C ... +30°C (59°F ... 86°F)
- Humidity: max. 50%
- Sufficient air quality surrounding the product



## 1.7 Warning, information and safety symbols in this manual

The warnings in this manual have been divided into the following two categories:


- The term "DANGER" indicates a hazardous situation which, if not avoided, will result in death or serious injury.
- The term "WARNING" indicates a hazardous situation which, if not avoided, could result in death or injury.

The safety symbols found in this manual may also be posted on the product. All personnel who install, disassemble, perform maintenance or use the product are to be familiar with and observe all safety symbols, labels, and instructions about the action they are performing.


**Table 1: Hazard**

	An exclamation point symbol inside a colored triangle indicates a hazardous situation.
	

**Table 2: Mandatory action**









	A white symbol inside a colored circle indicates an action that must be taken to avoid a hazardous situation.
---	---

**Table 3: Prohibited action**

	A ring with a diagonal bar indicates an action that is not allowed.
---	---

## 1.8 Main safety risks related to the installation, maintenance, disassembly and use of the product








### 1.8.1 Installation, maintenance and disassembly

	<b>WARNING!</b> <b>To reduce the risk of burns, fire, electric shock, or injury to persons, obey the following:</b>
	Use cut resistant safety gloves during the installation, maintenance or disassembly of the product.
	Use steel toed safety boots during the installation, maintenance or disassembly of the product.
	Read and understand the instructions and plan your work beforehand.
	Obey all local rules and regulations regarding workplace safety.
	Keep the work site tidy and free from debris throughout the installation, maintenance or disassembly process.
	Do not climb on top of the product or place any load on the roof of the product.
	Do not move the finished product by pushing if the optional wheels are not engaged.  The product is very heavy. Moving the product after installation without engaging the optional wheels is not allowed.



### 1.8.2 Electrical safety

Input for the electrical system: 100-240 VAC (10 A) 50-60 Hz

The maximum load for the electrical system is 6.6 A.

	<p><b>DANGER!</b></p> <p><b>To reduce the risk electric shock, obey the following:</b></p>
	<p>Disconnect the power cord from the power outlet before starting any cleaning, maintenance or disassembly procedures.</p> <p>The power cord serves as a power disconnect device for pluggable equipment. The power outlet shall be located near the equipment and shall be easily accessible.</p>
	<p><b>WARNING!</b></p> <p><b>To reduce the risk of burns, fire, electric shock, or injury to persons, obey the following:</b></p>
	<p>Connect the power cord to a properly grounded outlet only.</p>
	<p>Keep the power cord of the product away from heated surfaces.</p>
	<p>Do not use the pod if you notice any defects or damage to the electrical equipment.</p>
	<p>Do not connect any extension cords to the power outlet(s) of the product.</p>





### 1.8.3 Fire safety

	<p><b>WARNING!</b></p> <p><b>To reduce the risk of burns, fire, electric shock, or injury to persons, obey the following:</b></p>
	<p>If safely possible to perform, disconnect the power cord from the power outlet if there is a fire inside the product.</p> <p>The power cord serves as a power disconnect device for pluggable equipment. The power outlet shall be located near the equipment and shall be easily accessible.</p>

Fire safety end devices (alarms, sprinklers etc.) can also be installed inside the pods (instructions available upon request). The need for end devices inside the pod is always determined by the applicable local authorities.



#### 1.8.4 Lifting safety

	<b>WARNING!</b> <b>To reduce the risk of injury to persons and damage to property, obey the following:</b>
	Obey all local rules and regulations regarding lifting ergonomics and lifting safety.
	Carefully plan all lifts before hand.
	Keep the work site tidy and free from debris.

#### 1.8.5 Use








##### **Warning:**











**WARNING** –To reduce the risk of burns, fire, electric shock, or injury to persons:

If the product is anticipated to be used in places where children under the age of 8 and people with cognitive disabilities are present, use must be supervised at all times.



The maximum load for the Framery One adjustable table is 50 kg (110 lbs)



The maximum load for the Framery One chair is 136 kg (300 lbs)

	<b>WARNING!</b> <b>To reduce the risk of burns, fire, electric shock, or injury to persons, obey the following:</b>
	Read and understand the user instructions before using the product.
	Close supervision is necessary when this furnishing is used by, or near children, invalids, or disabled persons.
	Keep children away from extended foot support (or other similar parts).
	Risk of injury! Keep hands and other body parts clear of the side edges of the table when raising or lowering the electrically adjustable table top. This applies to all Framery pods with an electric adjustable table.


	Do not use the product if the surrounding conditions are in any way hazardous; the air circulating inside the pod is derived from the surrounding space.
	Do not use the product if the ventilation is not functioning.
	Do not use the product if the ventilation channels are blocked. Keep the ventilation channels free of lint, hair, and the like.
	Do not use the pod if you notice any defects in the electrical equipment or if the product is not working properly. Disconnect the power cord from the power outlet and contact your local dealer or the manufacturer immediately.
	Do not drop or insert any object into any opening if not specifically instructed to do so in this manual.
	Do not use outdoors.
	Do not use where aerosol (spray) products are being used or where oxygen is being administered.
	Do not climb on top of the product or place any load on the roof of the product.
	Do not lean against the product.
	Do not smoke inside the product.

#### 1.8.6 Moving the product on wheels (optional)


	<b>WARNING!</b> <b>The product is very heavy. Moving the product on the wheels requires planning and care. Make sure the product cannot tip over while moving.</b>
	Only move the product on even surfaces: no cracks or thresholds over 3 mm (1/8 in) on the intended route.

	When moving the product, only push below the vertical middle. Do not tow the product.
	Do not enter the product if it is standing on the wheels. It is only allowed to use the wheels for moving the product. Return the full weight of the product onto the leveling feet immediately after relocation and level the floor.

### 1.8.7 Radio frequency


 **Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


 **Note:** Any changes or modifications not expressly approved by Framery Oy could void the user's authority to operate the equipment.





The Control Unit of this Framery Phone Booth is a portable device per FCC 2.093. The FCC labelling and compliance information is electronically available on Control Unit display. The Control Unit is exclusively for use in Framery Phone Booth and not to be integrated to any other device.

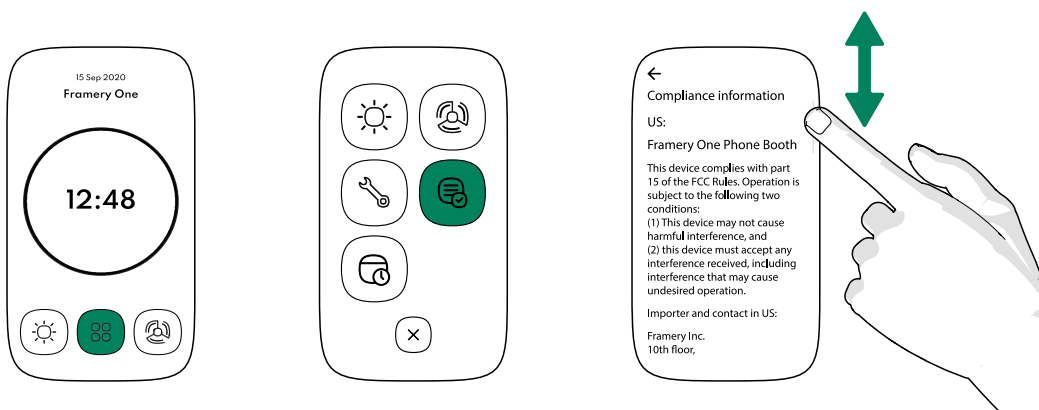The regulatory information can be accessed from the control panel:

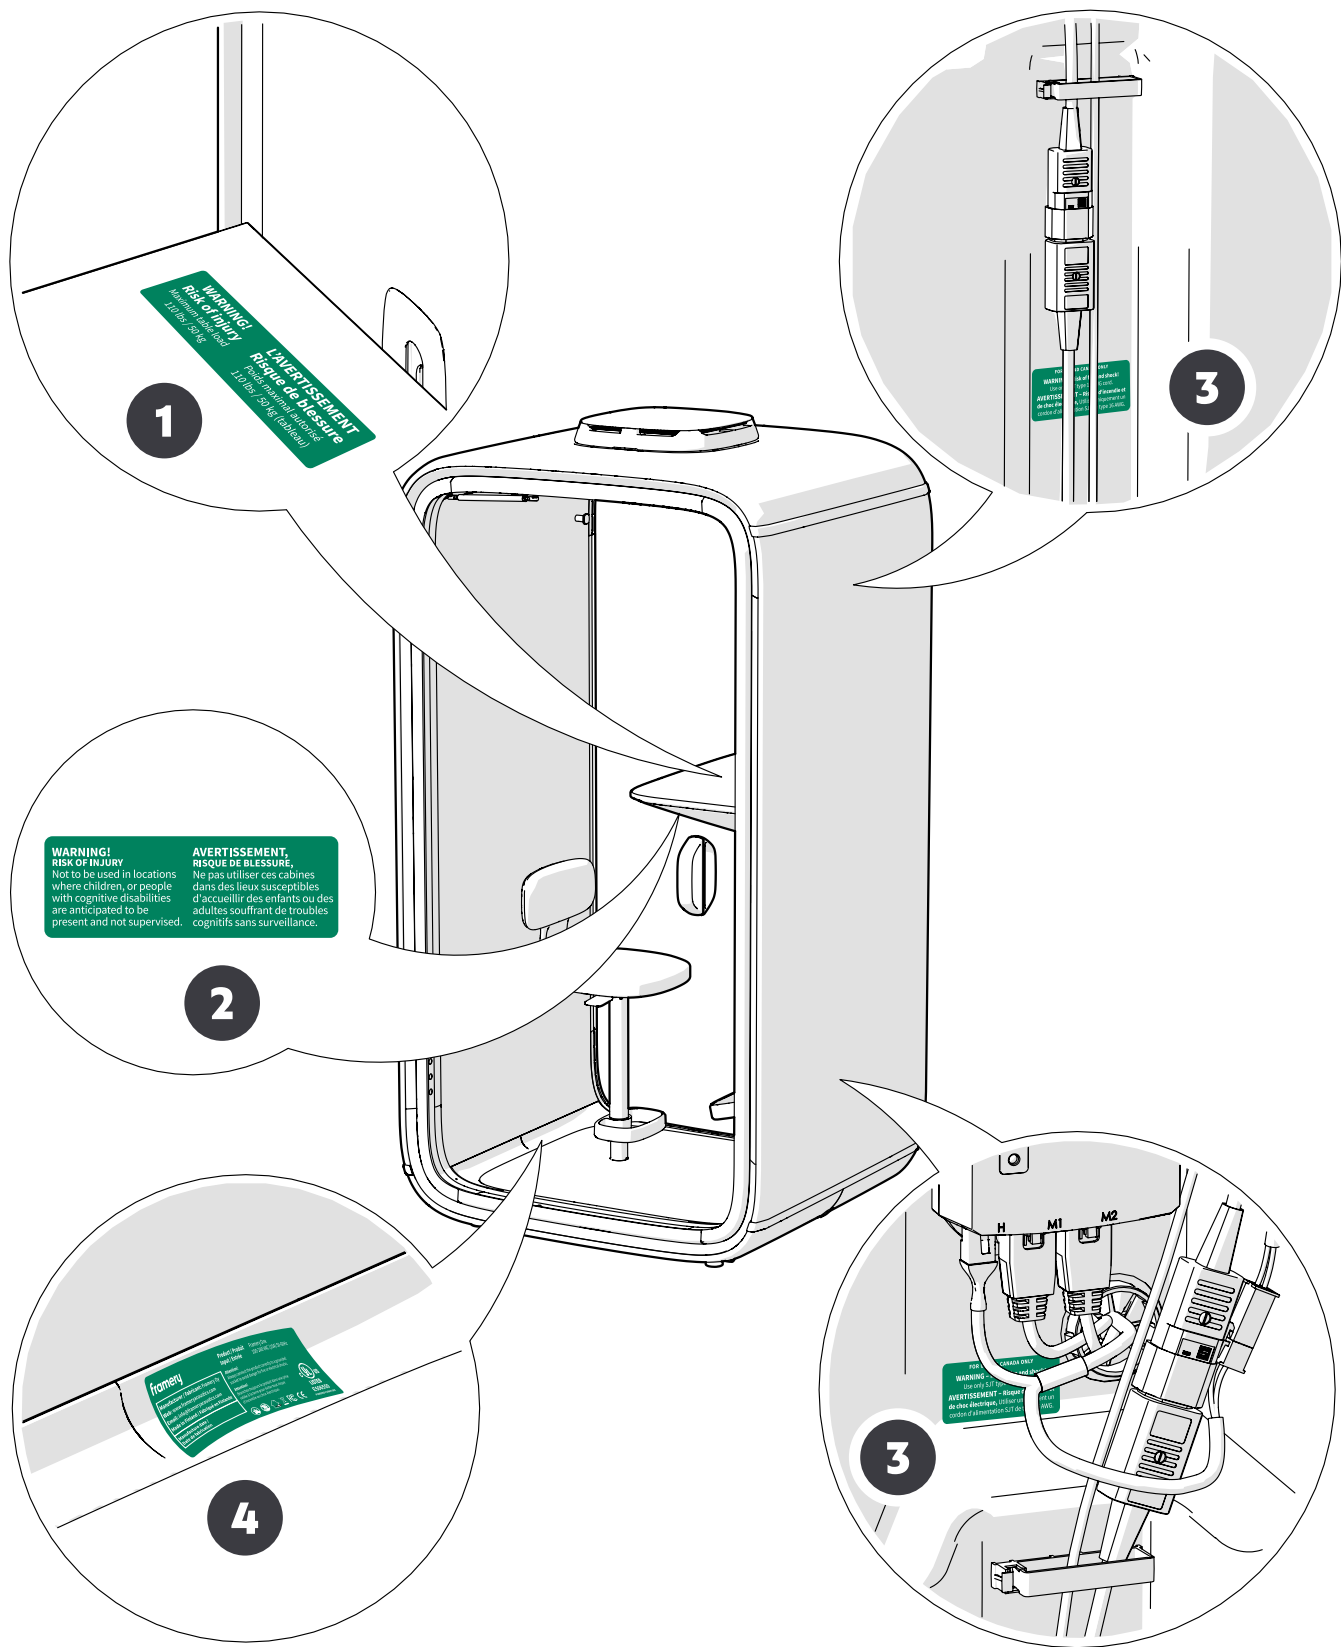


# 1.9 Location of product markings



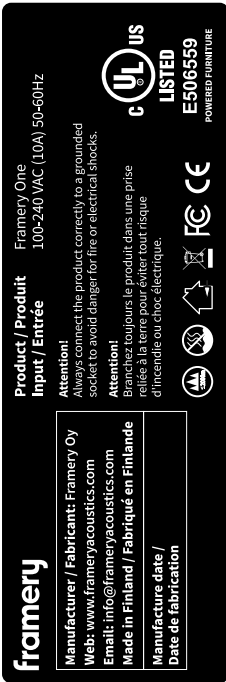Position	Label	Label text
1.		<p>WARNING! Risk of injury</p> <p>Maximum table load 110 lbs / 50 kg</p> <p>L'AVERTISSEMENT Risque de blessure</p> <p>Poids maximal autorisé 110 lbs / 50 kg (tableau)</p>
2.		<p>WARNING! RISK OF INJURY</p> <p>Not to be used in locations where children, or people with cognitive disabilities are anticipated to be present and not supervised.</p> <p>AVERTISSEMENT, RISQUE DE BLESSURE,</p> <p>Ne pas utiliser ces cabines dans des lieux susceptibles d'accueillir des enfants ou des adultes souffrant de troubles cognitifs sans surveillance.</p>
3.		<p>FOR US AND CANADA ONLY</p> <p>WARNING - Risk of fire and shock!</p> <p>Use only SJT type 16 AWG cord.</p> <p>AVERTISSEMENT - Risque d'incendie et de choc électrique, Utiliser uniquement un cordon d'alimentation SJT de type 16 AWG.</p>
4.		<p>Framery</p> <p>Manufacturer / Fabricant: Framery Oy</p> <p>WEB: <a href="http://www.frameryacoustics.com">www.frameryacoustics.com</a></p> <p>Email: <a href="mailto:info@frameryacoustics.com">info@frameryacoustics.com</a></p> <p>Made in Finland / Fabriqué en Finlande</p> <p>Manufacture date / Date de fabrication</p> <p>Product / Produit Framery One</p> <p>Input / Entrée 100-240 VAC (10 A) 50-60 HZ</p> <p>Attention! Always connect the product correctly to a grounded socket to avoid danger for fire or electrical shocks.</p> <p>Attention! Branchez toujours le produit dans une prise reliée à la terre pour éviter tout risque d'incendie ou choc électrique.</p>

**SAVE THESE INSTRUCTIONS**

## 2 Tools and accessories

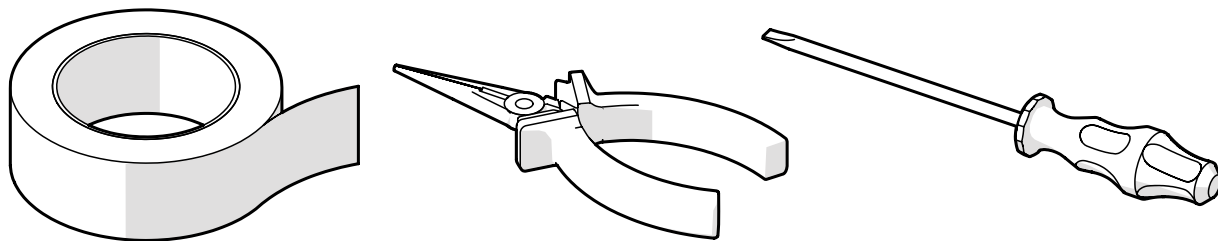


**Figure 1: Tools needed for adjusting the door**

### 3 Adjust the door closing force


The door has three magnet housings. Each magnet housing has four magnets. If the door is extremely difficult to open, remove a magnet from one of the magnet housings. This reduces the door closing force.

If the door does not close properly, add an extra magnet to one of the magnet housings.

1. Place a piece of tape below the magnet housing to protect the door from scratches.

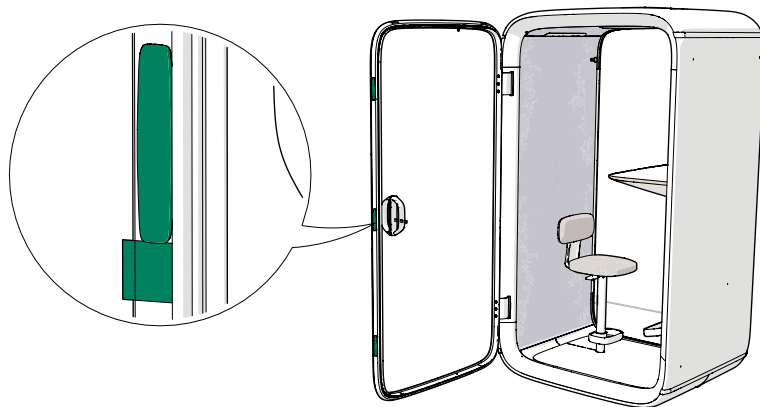


2. Carefully insert the screwdriver under the magnet housing and pry it slightly outward.

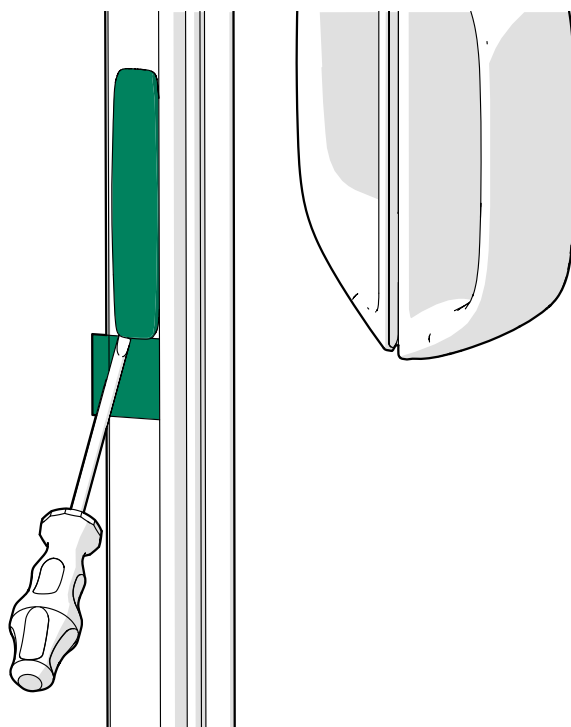

The magnet housing comes off from the backplate.

3. Remove the magnet housing from the backplate.

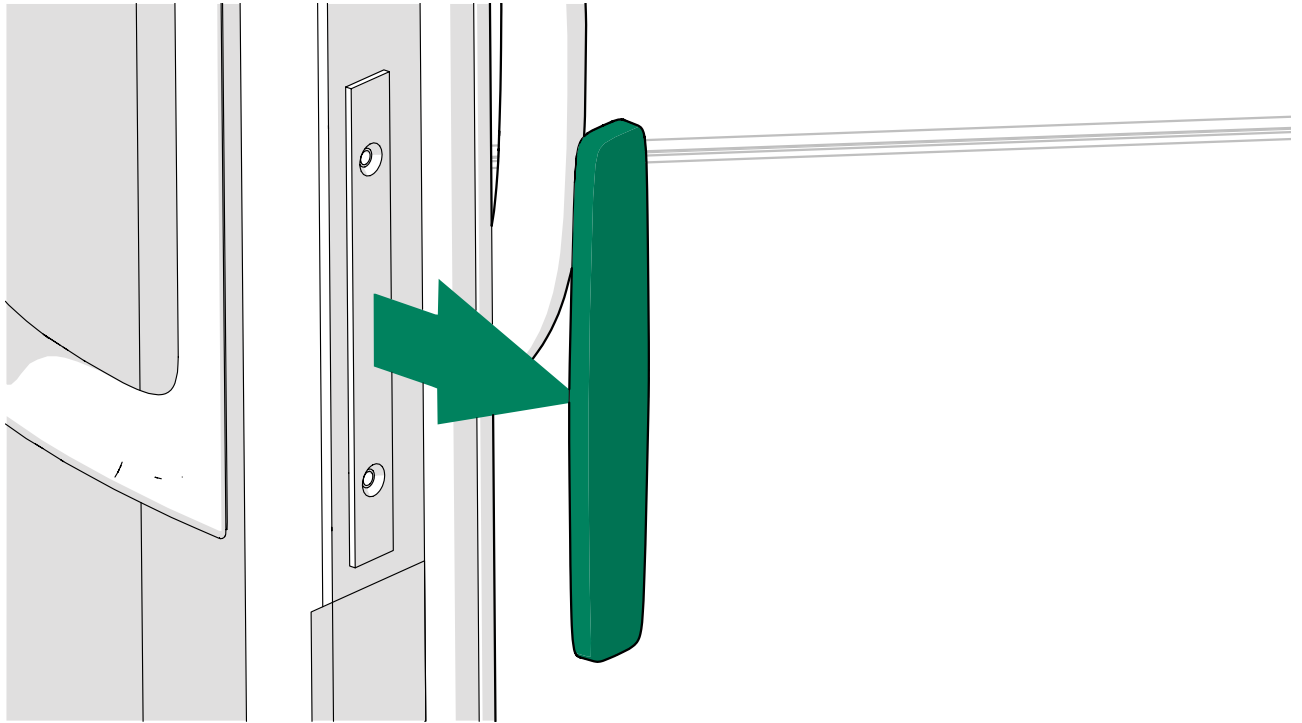

4. Do either of the following.

- Remove either of the two magnets in the middle.




**Tip:** To get the magnet out from the housing, tap the magnet housing against the backplate on the door.



- Add a magnet to the magnet housing.



5. Install the magnet housing.

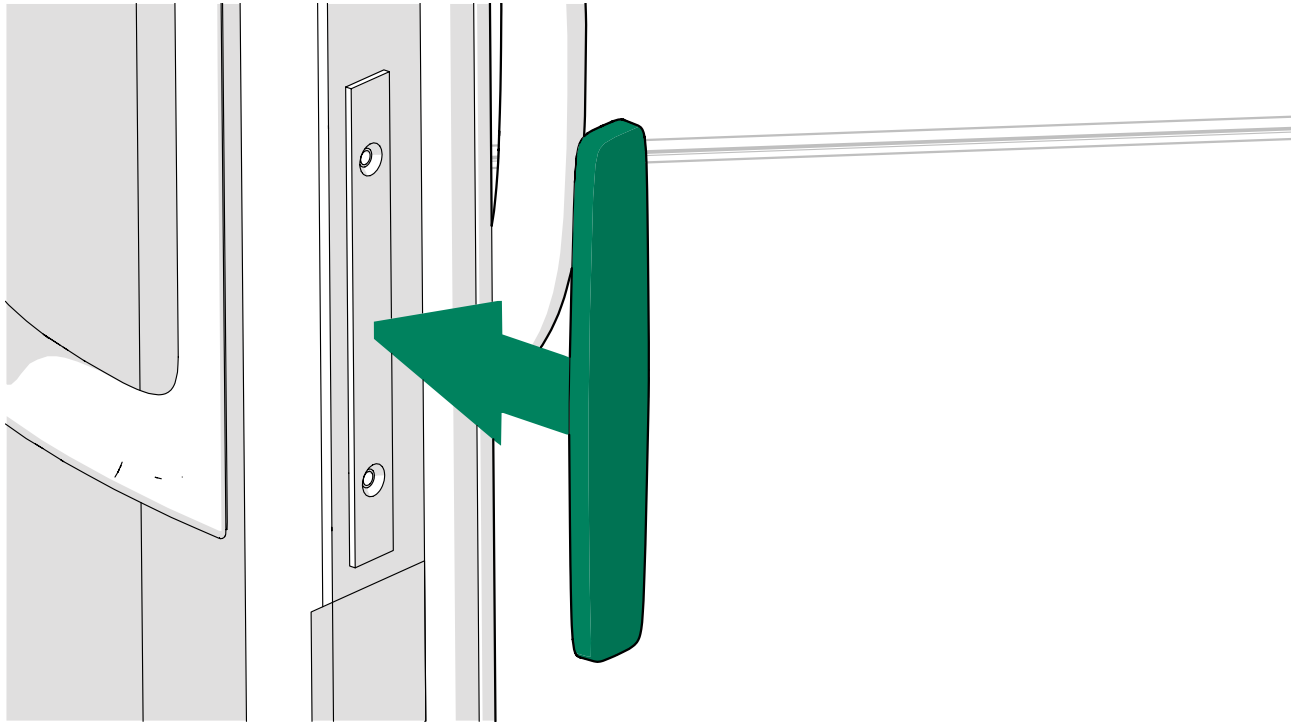

6. Remove the piece of tape from the door.
7. Check that the door closes properly but is not too difficult to open. If you need to further adjust the door closing force, remove a magnet from one of the other magnet housings.



**Note:** There must be at least three magnets in each housing.

## 4 Adjust the door height

Both door hinges have two adjustment pieces, a thicker (5 mm) adjustment piece at the bottom of the hinge and thinner (1 mm) adjustment piece at the top of the hinge. The pod installation package has a few extra 1 mm adjustment pieces.


To lower or raise the door, move the adjustment pieces or replace the thicker adjustment pieces with one or more thinner ones.

If the door does not seal properly from the handle-side upper corner, raise the door.


If the door does not seal properly from the handle-side lower corner, lower the door.

### 4.1 Raise the door


1. Remove the plastic trims from the hinge-side wall.

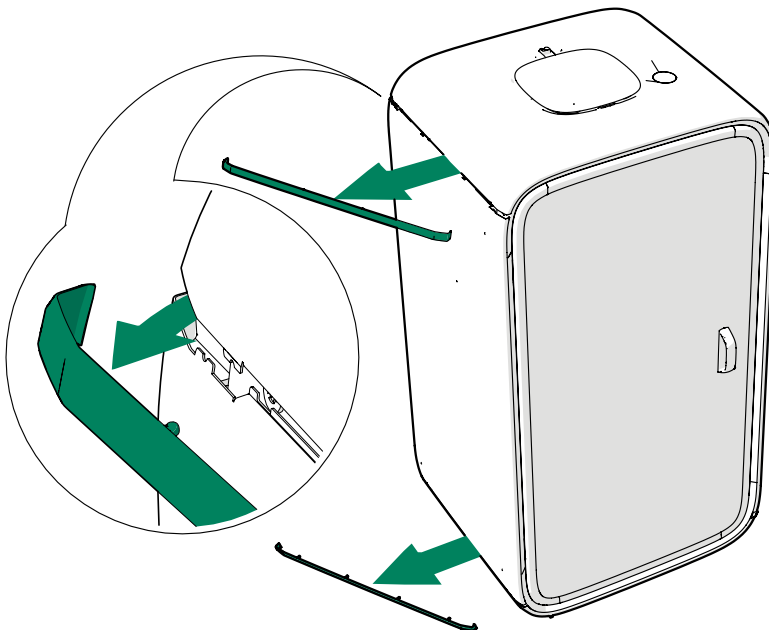


2. Remove the wall body cover from the hinge-side wall.

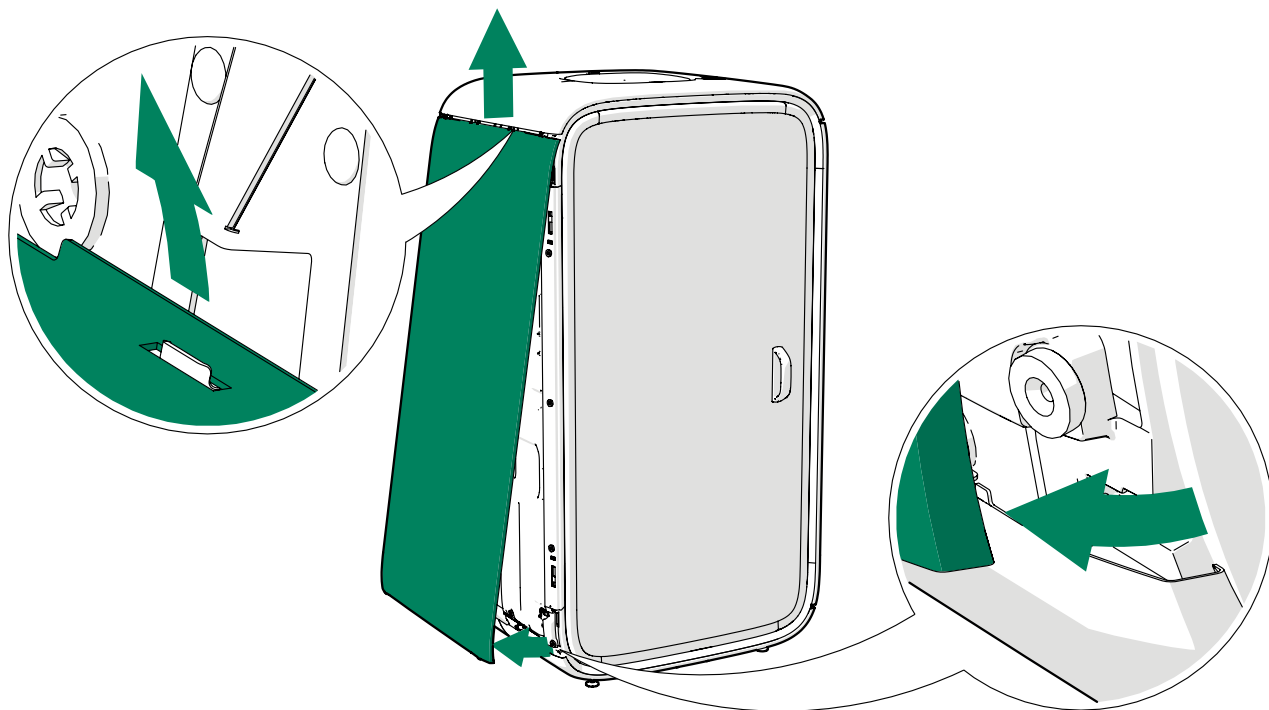


3. Open the door and lift it slightly.

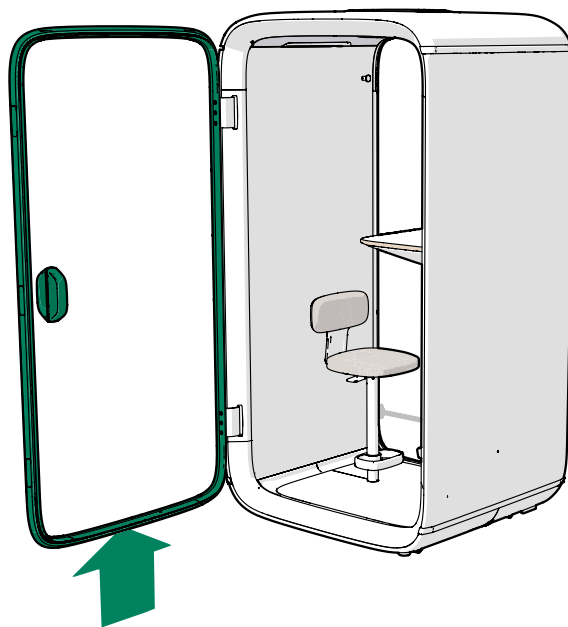

4. Remove the 1 mm adjustment piece from the top of the hinge. Remove the adjustment piece from the other hinge as well.

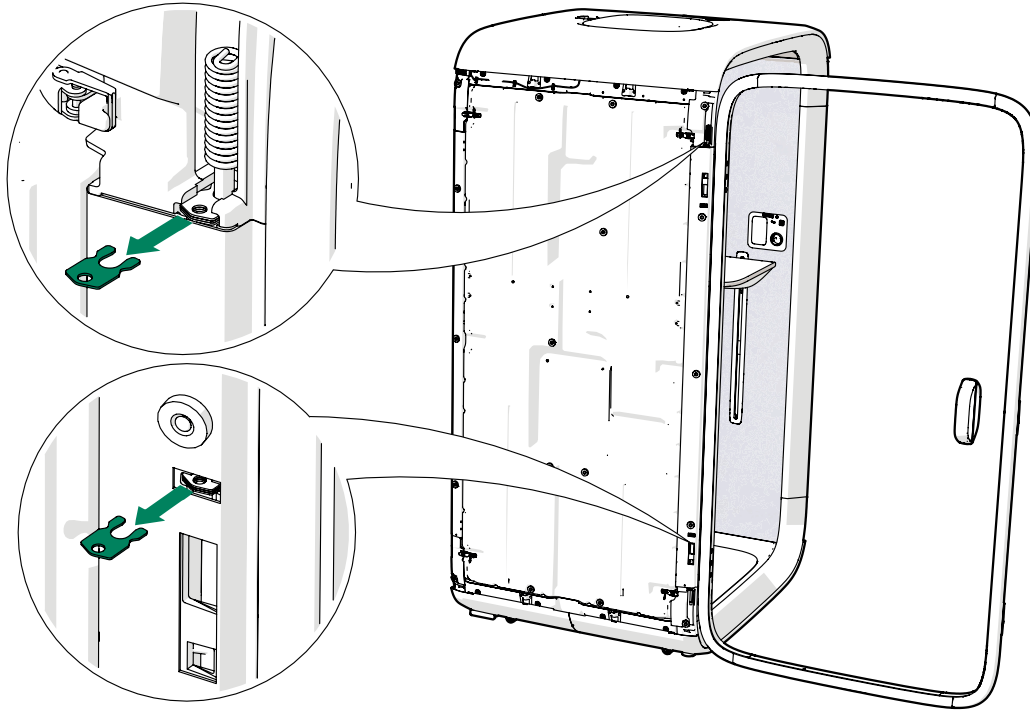


5. Insert the removed adjustment piece to the bottom of the hinge. Do this for the other hinge as well.

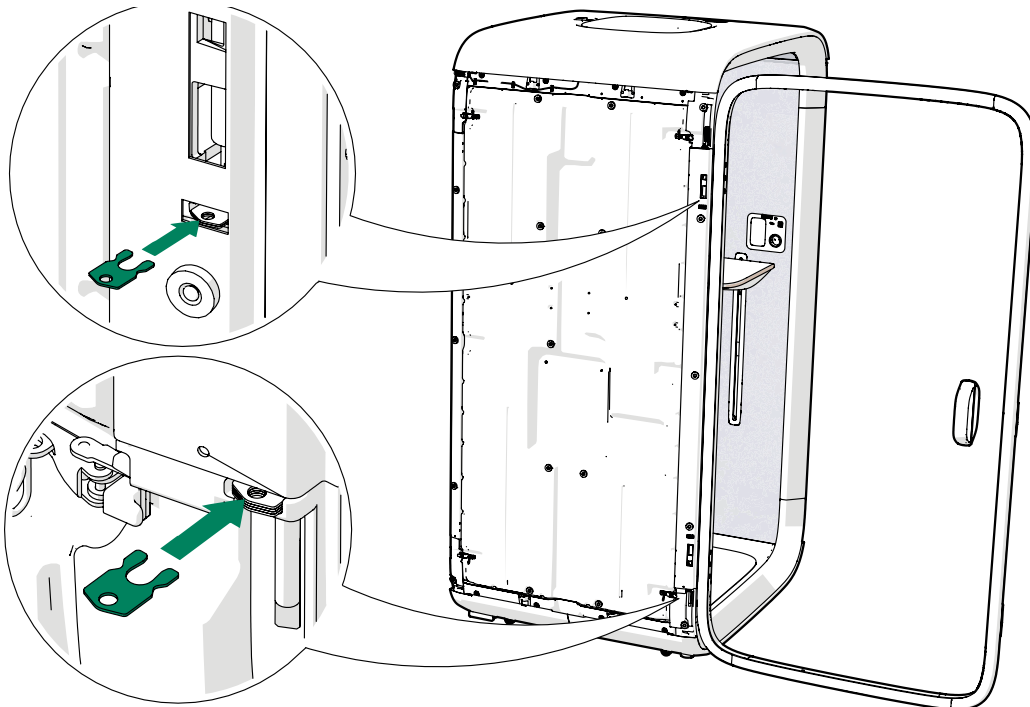


6. Make sure that the door is aligned. If there is still more empty space at the handle-side upper corner of the door than at the handle-side lower corner, see [Adjust the horizontal alignment of the door](#) on page 24.
7. Install the wall body cover.
8. Install the plastic trims.

## 4.2 Lower the door


1. Remove the plastic trims from the hinge-side wall.

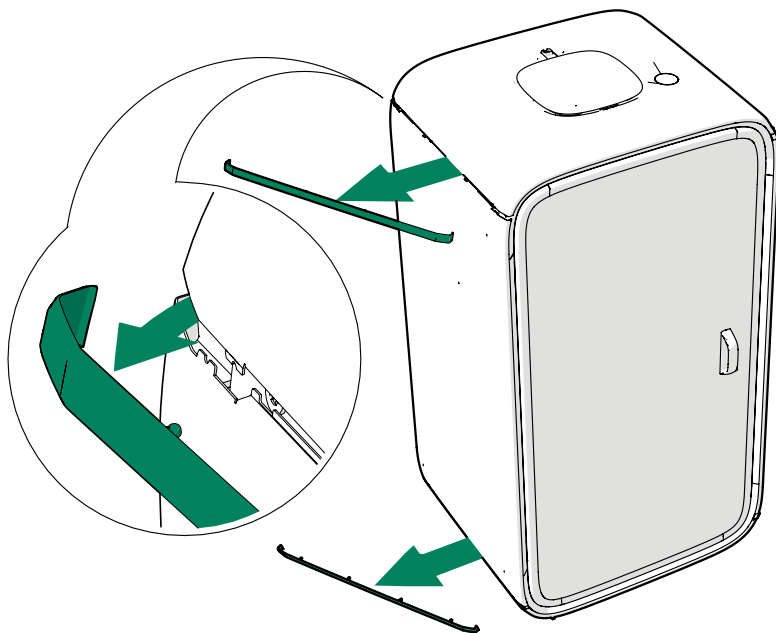


2. Remove the wall body cover from the hinge-side wall.

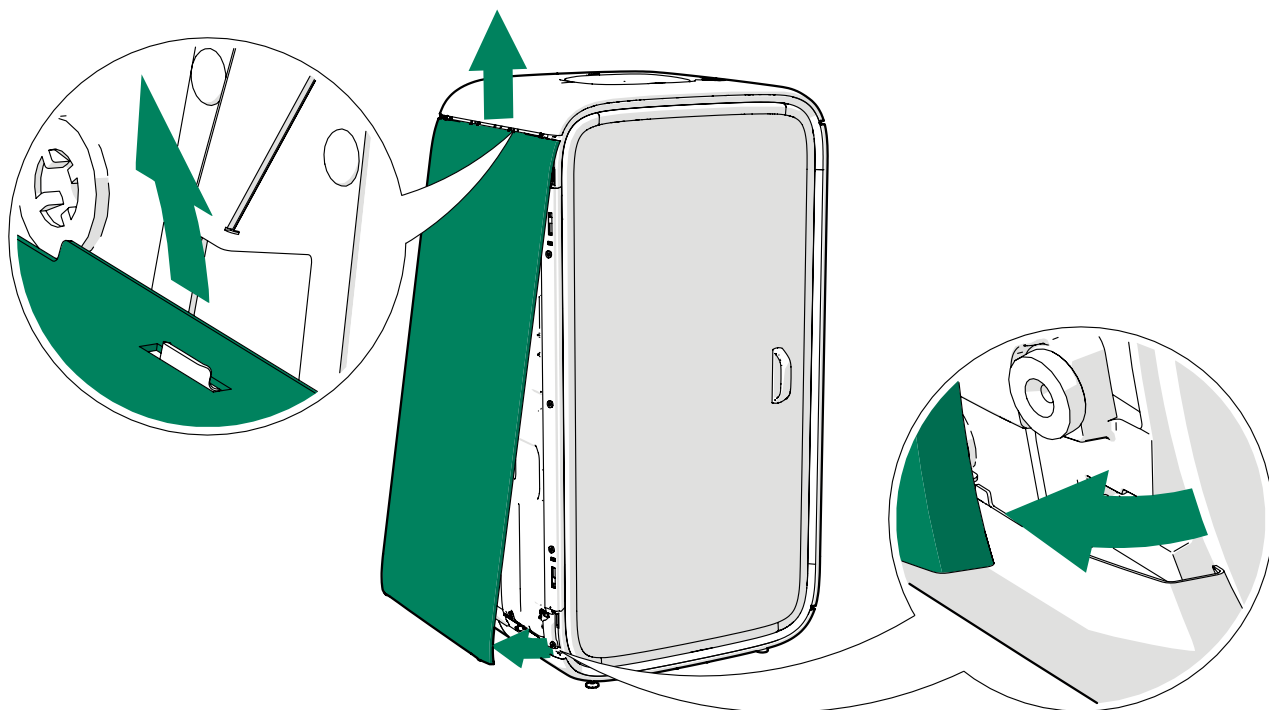

3. Open the door and lift it slightly.

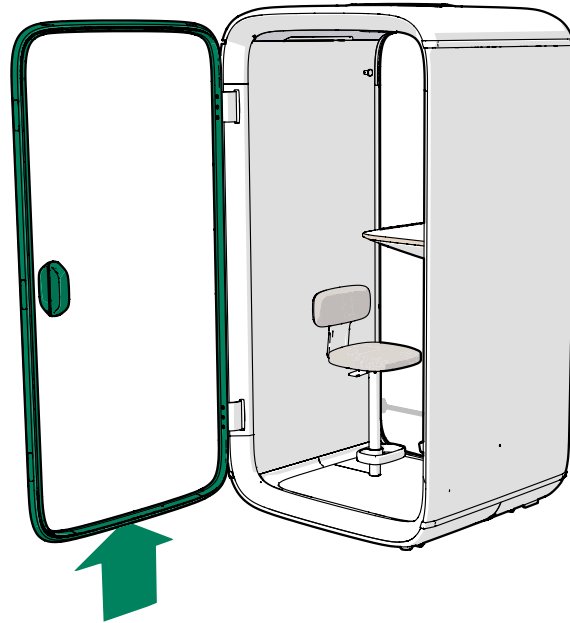


4. Remove the 5 mm adjustment piece from the bottom of the hinge. Remove the adjustment piece from the other hinge as well.

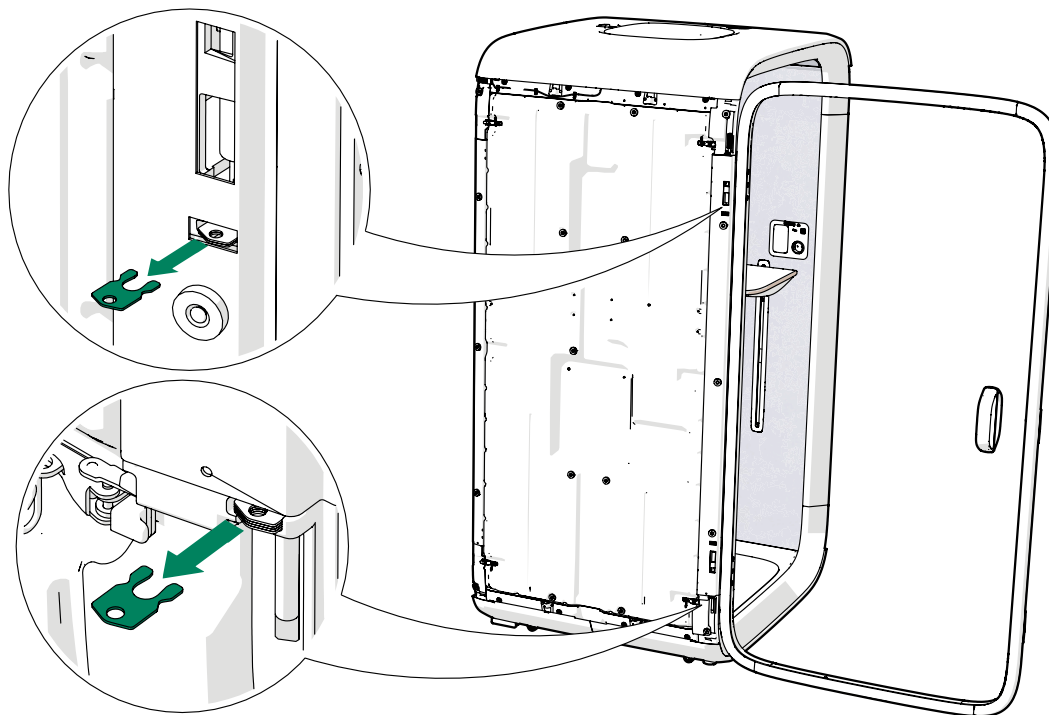

5. Insert the removed adjustment piece to the top of the hinge. Do this for the other hinge as well.

To lower the door less, replace the removed 5 mm adjustment piece with one to four thinner 1 mm adjustment pieces and add the required number of 1 mm adjustment pieces to the top of the hinge. The combined thickness of the adjustment pieces at one hinge must be exactly 6 mm.

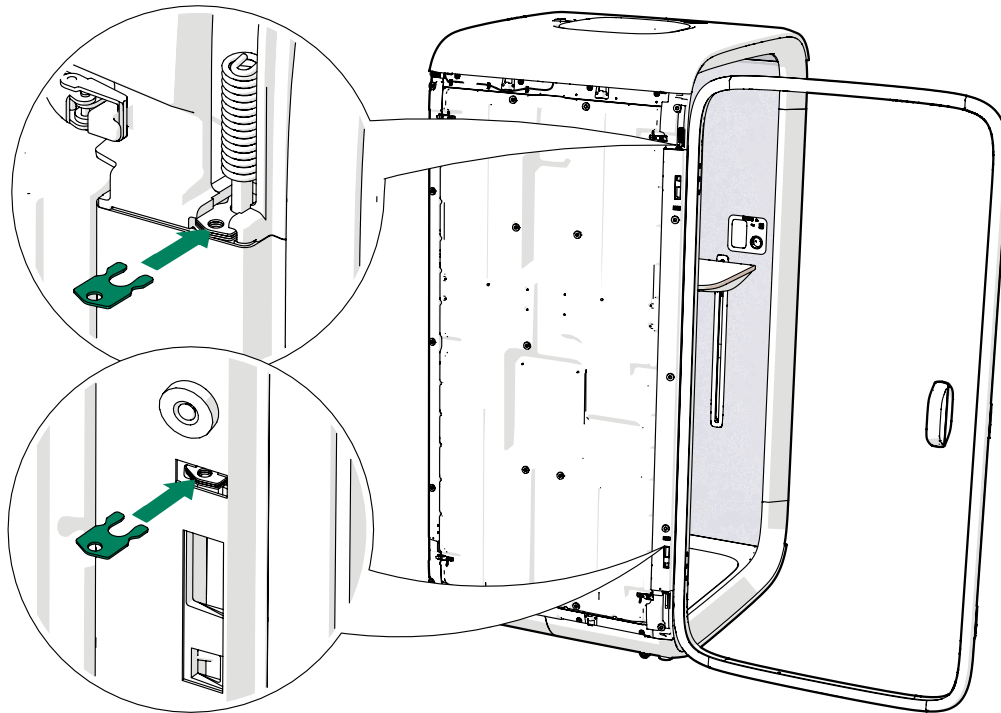

6. Make sure that the door is aligned. If there is still more empty space at the handle-side lower corner of the door than at the handle-side upper corner, see [Adjust the horizontal alignment of the door](#) on page 24.
7. Install the wall body cover.
8. Install the plastic trims.

## 5 Adjust the horizontal alignment of the door

Both door hinges have spacers, a thicker (3 mm) spacer in the lower hinge and thinner (2 mm) spacer in the upper hinge. The pod installation package has a few extra 1mm spacers.


To adjust the horizontal alignment of the door, you can do the following.

- Add one or more extra spacers to one or both hinges.
- Remove the spacer from the lower hinge.
- Replace one or both existing spacers with thinner ones.

1. Remove the protective caps from both hinges.



**Note:** Do not use sharp tools to remove the caps. The frame scratches easily.

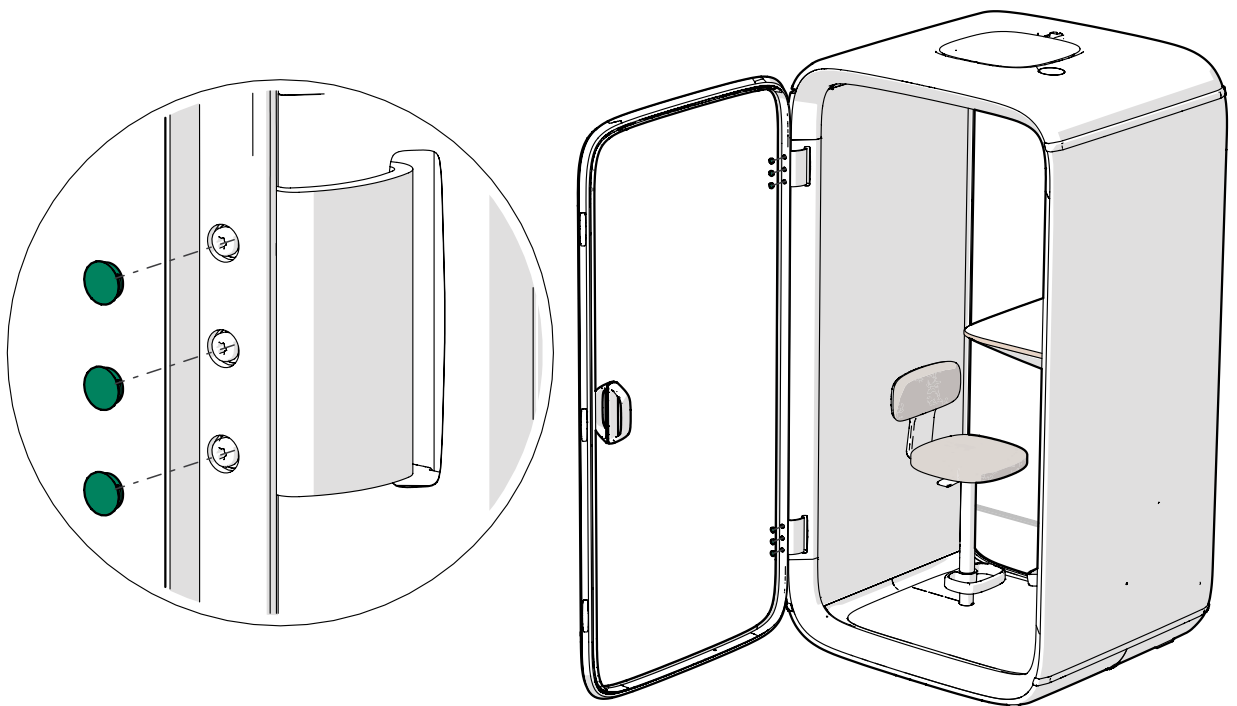





2. Loosen the screws from both hinges.



**Note:** Do not remove the screws.

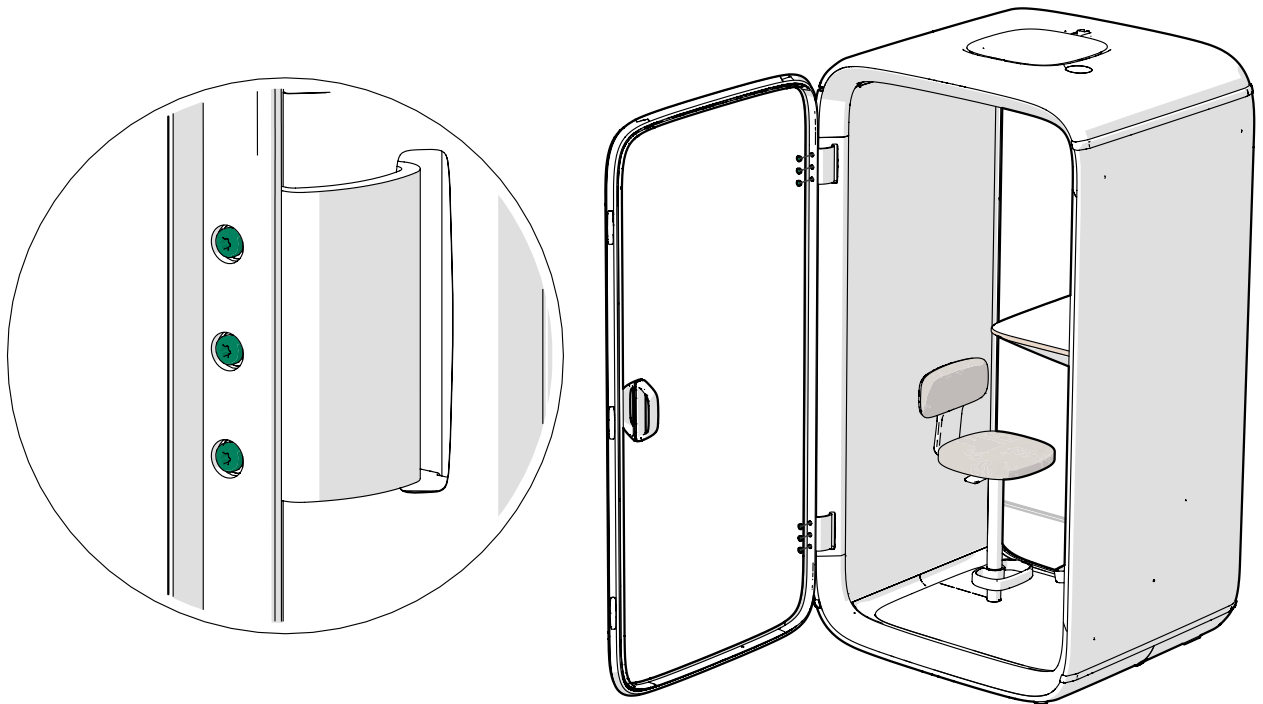

3. With the door in the open position, slightly pull the door away from the pod chassis.
4. Remove or add a spacer to the hinges.

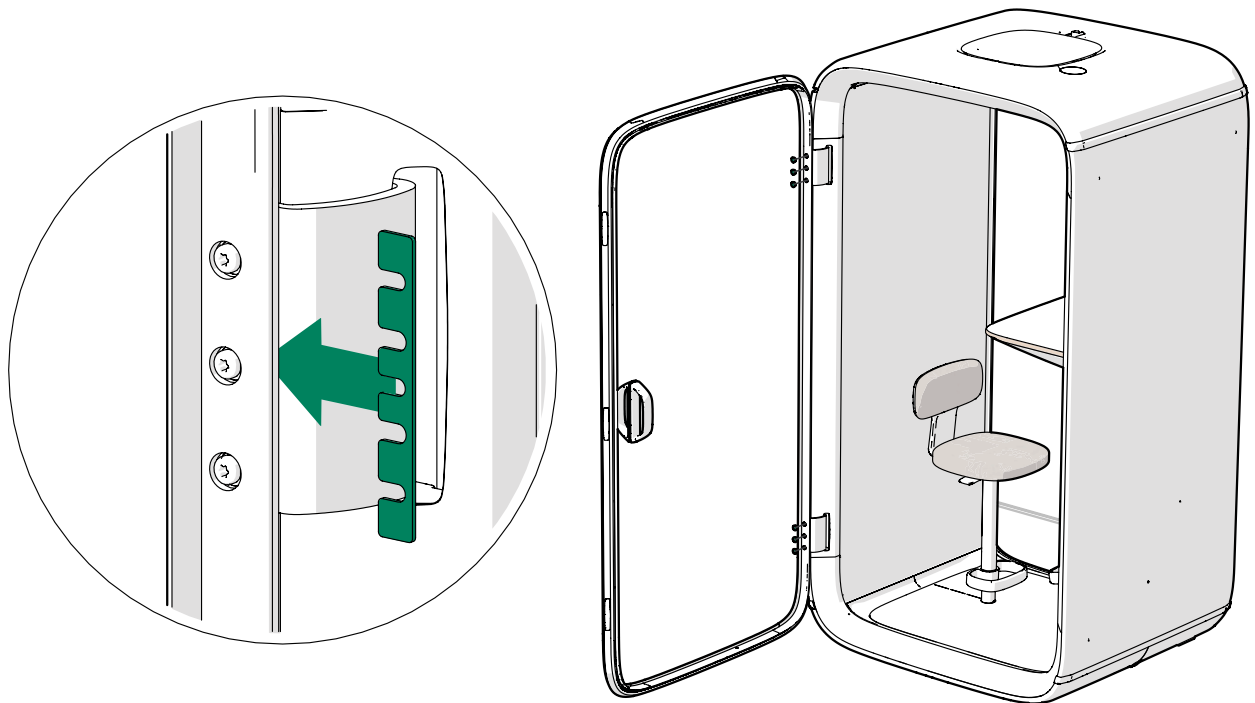

5. Tighten the hinge screws.
6. Install the protective caps.





**framery**

Framery One  
Adjusting the door  
Patamäenkatu 7  
33900 Tampere  
FINLAND  
VAT: FI 23527139